UN	77	4 5	: C 1	FI	ED
UN	し上	A.S	251	17.1	エレ

. 4116 FILE CORY

.

SECURITY CLASSIFICATION OF THIS PAGE (When Date Entered) BEAD DISTRUCTIONS REPORT DOCUMENTATION PAGE BEFORE COMPLETEING FORM 1. REPORT NUMBER 12. SOVT ACCESSION NO. 3. RECIPIENT'S CATALOG NUMBER 4. TITLE (and Subtitle) 5. TYPE OF REPORT & PERIOD COVERED 24 March 1989 - 1 Dec. 1990 Ada Compiler Validation Summary Report: DDC-I, In DACS-80386 Protected Mode, Version 4.3, MicroVAX II (host) 6. PERFORMING DRG. REPORT NUMBER to Intel 80386 iSBC 386/21 (target), 890324S1..0068 7. AUTHORIS) 8. CONTRACT OR GRANT NUMBER(S) National Institute of Standards and Technology Gaithersburg, Maryland, USA 9. PERFORMING ORGANIZATION AND ADDRESS 10. PROGRAM ELEMENT, PROJECT, TASK AREA & WOR. UNIT NUMBERS National Institute of Standards and Technology Gaithersburg, Maryland, USA 11. CONTROLLING OFFICE NAME AND ADDRESS
Ada Joint Program Office
United States Department of Defense
Washington, DC 20301-3081 12. REPORT DATE 13. NUMBER OF PAGES 14. MONITORING AGENCY NAME & ADDRESS(If different from Controlling Office) 15. SECURITY CLASS (of this report) UNCLASSIFIED National Institute of Standards and Technology 154. DECLASSIFICATION/DOWNGRADING Gaithersburg, Maryland, USA

16. DISTRIBUTION STATEMENT (of this Report)

Approved for public release; distribution unlimited.

17. DISTRIBUTION STATEMENT (of the abstract entered in Block ?O. If different from Report)

UNCLASSIFIED

18. SUPPLEMENTARY NOTES

S DTIC S ELECTE MAY 3 0 1989 D E

-

N/A

19. KEYWORDS (Continue on reverse side if necessary and identify by block number)

Ada Programming language, Ada Compiler Validation Summary Report, Ada Compiler Validation Capability, ACVC, Validation Testing, Ada Validation Office, AVO, Ada Validation Facility, AVF, ANSI/MIL-STD-1815A, Ada Joint Program Office, AJPO

20. ABSTRACT (Continue on reverse side if necessary and identify by block number)

DACS-80386 Protected Mode, Version 4.3, DDC-I, Inc., National Institute of Standards and Technology, MicroVAX II under MicroVMS, Version 4.6 (host) to Intel 80386 iSBC 386/21 under bare (target), ACVC 1.10

89 5 30 005

DD 10km 1473

473 EDITION OF 1 NOV 65 IS OBSOLETE

1 JAN 73

S/N 0102-LF-014-6601

UNCLASSIFIED

SECURITY CLASSIFICATION OF THIS PAGE (When Data Entered)

AVF Control Number: NIST89VDDC530 2.10

DRAFT COMPLETED: 03-31-89 FINAL COMPLETED: 04-25-89

Ada Compiler Validation Summary Report:

Compiler Name: DACS-80386 Protected Mode, Version 4.3

Certificate Number: 89032451.10068

Host: MicroVAX II under MicroVMS, Version 4.6

Target: Intel 80386 iSBC 386/21 under Bare

Testing Completed 24 March 1989 Using ACVC 1.10

This report has been reviewed and is approved.

Ada Validation Facility Dr. David K. Jefferson

Chief, Information Systems

Engineering Division

National Computer Systems Laboratory (NCSL)

National Institute of Standards and Technology

Building 225, Room A266

Gaithersburg, MD 20899

Ada Validation Organization

Dr. John F. Kramer

Institute for Defense Analyses

Alexandria VA 22311

Accession For

NTIS GLA&I
DTIC TAB
Unannounced
Justification

By
Distribution/
Availability Codes

Avail and/or
Dist
Special

Ada Joint Program Office

Dr. John Solomond

Director

Washington D.C. 20301

AVF Control Number: NIST89VDDC530 2.10

DRAFT COMPLETED: 03-31-89 FINAL COMPLETED: 04-25-89

Ada COMPILER
VALIDATION SUMMARY REPORT:
Certificate Number: 890324S1.10068
DDC-I, Inc.
DACS-80386 Protected Mode, Version 4.3
MicroVAX II Host and Intel 80386 iSBC 386/21 Target

Completion of On-Site Testing: 24 March 1989

Prepared By:
Software Standards Validation Group
National Computer Systems Laboratory
National Institute of Standards and Technology
Building 225, Room A266
Gaithersburg, Maryland 20899

Prepared For:
Ada Joint Program Office
United States Department of Defense
Washington DC 20301-3081

AVF Control Number: NIST89VDDC530_2.10

DRAFT COMPLETED: 03-31-89 FINAL COMPLETED: 04-25-89

Ada Compiler Validation Summary Report:

Compiler Name: DACS-80386 Protected Mode, Version 4.3

Certificate Number: 89032451.10068

Host: MicroVAX II under MicroVMS, Version 4.6

Target: Intel 80386 iSBC 386/21 under Bare

Testing Completed 24 March 1989 Using ACVC 1.10

This report has been reviewed and is approved.

Ada Validation Facility

Dr. David K. Jefferson V Chief, Information Systems

Engineering Division

National Computer Systems Laboratory (NCSL) National Institute of Standards and Technology

Building 225, Room A266 Gaithersburg, MD 20899

Ada Validation Organization
Dr. John F. Kramer
Institute for Defense Analyses
Alexandria VA 22311

Ada Joint Program Office Dr. John Solomond Director Washington D.C. 20301

TABLE OF CONTENTS

CHAPTER	1	INTRODUCTION
	1.2 1.3 1.4	PURPOSE OF THIS VALIDATION SUMMARY REPORT
CHAPTER	2	CONFIGURATION INFORMATION
		CONFIGURATION TESTED
CHAPTER	3	TEST INFORMATION
	3.2 3.3 3.4 3.5 3.6 3.7 3.7.1	
APPENDIX	ζ A	CONFORMANCE STATEMENT
APPENDIX	К В	APPENDIX F OF THE Ada STANDARD
APPENDI	K C	TEST PARAMETERS
APPENDIX	C D	WITHDRAWN TESTS
APPENDIX	Ε	COMPILER OPTIONS AS SUPPLIED BY DDC-I, Inc.

CHAPTER 1

INTRODUCTION

This Validation Summary Report (VSR) describes the extent to which a specific Ada compiler conforms to the Ada Standard, ANSI/MIL-STD-1815A. This report explains all technical terms used within it and thoroughly reports the results of testing this compiler using the Ada Compiler Validation Capability, (ACVC) a 'An Ada compiler must be implemented according to the Ada Standard, and any implementation-dependent features must conform to the requirements of the Ada Standard. The Ada Standard must be implemented in its entirety, and nothing can be implemented that is not in the Standard.

Even though all validated Ada compilers conform to the Ada Standard, it must be understood that some differences do exist between implementations. The Ada Standard permits some implementation dependencies -- for example, the maximum length of identifiers or the maximum values of integer types. Other differences between compilers result from the characteristics of particular operating systems, hardware, or implementation strategies. All the dependencies observed during the process of testing this compiler are given in this report. The information in this report is derived from the test results produced during validation testing. The validation process includes submitting a suite of standardized tests, the ACVC, as inputs to an Ada compiler and evaluating the results. The purpose of validating is to ensure conformity of the compiler to the Ada Standard by testing that the compiler properly implements legal language constructs and that it identifies and rejects illegal language constructs. The testing also identifies behavior that is implementation dependent, but is permitted by the Ada Standard. Six classes of tests are used. These tests are designed to perform checks at compile time, at link time, and during execution.

1.1 PURPOSE OF THIS VALIDATION SUMMARY REPORT

This VSR documents the results of the validation testing performed on an

Ada compiler. Testing was carried out for the following purposes:

- . To attempt to identify any language constructs supported by the compiler that do not conform to the Ada Standard
- . To attempt to identify any language constructs not supported by the compiler but required by the Ada Standard
- . To determine that the implementation-dependent behavior is allowed by the Ada Standard

Testing of this compiler was conducted by the AVF according to procedures established by the Ada Joint Program Office and administered by the Ada Validation Organization (AVO). On-site testing was completed 24 March 1989 at Phoenix, Arizona.

1.2 USE OF THIS VALIDATION SUMMARY REPORT

Consistent with the national laws of the originating country, the AVO may make full and free public disclosure of this report. In the United States, this is provided in accordance with the "Freedom of Information Act" (5 U.S.C. #552). The results of this validation apply only to the computers, operating systems, and compiler versions identified in this report.

The organizations represented on the signature page of this report do not represent or warrant that all statements set forth in this report are accurate and complete, or that the subject compiler has no nonconformities to the Ada Standard other than those presented. Copies of this report are available to the public from:

Ada Information Clearinghouse Ada Joint Program Office OUSDRE The Pentagon, Rm 3D-139 (Fern Street) Washington DC 20301-3081

or from:

Software Standards Validation Group National Computer Systems Laboratory National Institue of Standards and Technology Building 225, Room A266 Gaithersburg, Maryland 20899 Questions regarding this report or the validation test results should be directed to the AVF listed above or to:

Ada Validation Organization Institute for Defense Analyses 1801 North Beauregard Street Alexandria VA 22311

1.3 REFERENCES

- 1. Reference Manual for the Ada Programming Language, ANSI/MIL-STD-1815A, February 1983 and ISO 8652-1987.
- 2. Ada Compiler Validation Procedures and Guidelines, Ada Joint Program Office, 1 January 1987.
- 3. Ada Compiler Validation Capability Implementers' Guide, SofTech, Inc., December 1986.
- 4. Ada Compiler Validation Capability User's Guide, December 1986.

1.4 DEFINITION OF TERMS

ACVC The Ada Compiler Validation Capability. The set of Ada programs that tests the conformity of an Ada compiler to the Ada programming language.

An Ada Commentary contains all information relevant to the Commentary point addressed by a comment on the Ada Standard. These comments are given a unique identification number having the form AI-ddddd.

Ada Standard ANSI/MIL-STD-1815A, February 1983 and ISO 8652-1987.

Applicant The agency requesting validation.

AVF The Ada Validation Facility. The AVF is responsible for conducting compiler validations according to procedures contained in the Ada Compiler Validation Procedures and Guidelines.

AVO

The Ada Validation Organization. The AVO has oversight authority over all AVF practices for the purpose of maintaining a uniform process for validation of Ada compilers. The AVO provides administrative and technical support for Ada validations to ensure

consistent practices.

Compiler

A processor for the Ada language. In the context of this report, a compiler is any language processor, including cross-compilers, translators, and interpreters.

Failed test

An ACVC test for which the compiler generates a result that demonstrates nonconformity to the Ada Standard.

Host

The computer on which the compiler resides.

Inapplicable test

An ACVC test that uses features of the language that a compiler is not required to support or may legitimately support in a way other than the one expected by the test.

Passed test

An ACVC test for which a compiler generates the expected result.

Target

The computer which executes the code generated by the compiler.

Test

A program that checks a compiler's conformity regarding a particular feature or a combination of features to the Ada Standard. In the context of this report, the term is used to designate a single test, which may comprise one or more files.

Withdrawn

An ACVC test found to be incorrect and not used to check test conformity to the Ada Standard. A test may be incorrect because it has an invalid test objective, fails to meet its test objective, or contains illegal or erroneous use of the language.

1.5 ACVC TEST CLASSES

Conformity to the Ada Standard is measured using the ACVC. The ACVC contains both legal and illegal Ada programs structured into six test classes: A, B, C, D, E, and L. The first letter of a test name identifies the class to which it belongs. Class A, C, D, and E tests are executable, and special program units are used to report their results during execution. Class B tests are expected to produce compilation errors. Class L tests are expected to produce errors because of the way in which a program library is used at link time.

Class A tests ensure the successful compilation and execution of legal Ada programs with certain language constructs which cannot be verified at run time. There are no explicit program components in a Class A test to check semantics. For example, a Class A test checks that reserved

words of another language (other than those already reserved in the Ada language) are not treated as reserved words by an Ada compiler. A Class A test is passed if no errors are detected at compile time and the program executes to produce a PASSED message.

Class B tests check that a compiler detects illegal language usage. Class B tests are not executable. Each test in this class is compiled and the resulting compilation listing is examined to verify that every syntax or semantic error in the test is detected. A Class B test is passed if every illegal construct that it contains is detected by the compiler.

Class C tests check the run time system to ensure that legal Ada programs can be correctly compiled and executed. Each Class C test is self-checking and produces a PASSED, FAILED, or NOT APPLICABLE message indicating the result when it is executed.

Class D tests check the compilation and execution capacities of a compiler. Since there are no capacity requirements placed on a compiler by the Ada Standard for some parameters—for example, the number of identifiers permitted in a compilation or the number of units in a library—a compiler may refuse to compile a Class D test and still be a conforming compiler. Therefore, if a Class D test fails to compile because the capacity of the compiler is exceeded, the test is classified as inapplicable. If a Class D test compiles successfully, it is self-checking and produces a PASSED or FAILED message during execution.

Class E tests are expected to execute successfully and check implementation dependent options and resolutions of ambiguities in the Ada Standard. Each Class E test is self-checking and produces a NOT APPLICABLE, PASSED, or FAILED message when it is compiled and executed. However, the Ada Standard permits an implementation to reject programs containing some features addressed by Class E tests during compilation. Therefore, a Class E test is passed by a compiler if it is compiled successfully and executes to produce a PASSED message, or if it is rejected by the compiler for an allowable reason.

Class L tests check that incomplete or illegal Ada programs involving multiple, separately compiled units are detected and not allowed to execute. Class L tests are compiled separately and execution is attempted. A Class L test passes if it is rejected at link time--that is, an attempt to execute the main program must generate an error message before any declarations in the main program or any units referenced by the main program are elaborated. In some cases, an implementation may legitimately detect errors during compilation of the test.

Two library units, the package REPORT and the procedure CHECK_FILE, support the self-checking features of the executable tests. The package REPORT provides the mechanism by which executable tests report PASSED, FAILED, or NOT APPLICABLE results. It also provides a set of identity

functions used to defeat some compiler optimizations allowed by the Ada Standard that would circumvent a test objective. The procedure CHECK_FILE is used to check the contents of text files written by some of the Class C tests for Chapter 14 of the Ada Standard. The operation of REPORT and CHECK_FILE is checked by a set of executable tests. These tests produce messages that are examined to verify that the units are operating correctly. If these units are not operating correctly, then the validation is not attempted.

The text of each test in the ACVC follows conventions that are intended to ensure that the tests are reasonably portable without modification. For example, the tests make use of only the basic set of 55 characters, contain lines with a maximum length of 72 characters, use small numeric values, and place features that may not be supported by all implementations in separate tests. However, some tests contain values that require the test to be customized according to implementation-specific values--for example, an illegal file name. A list of the values used for this validation is provided in Appendix C.

A compiler must correctly process each of the tests in the suite and demonstrate conformity to the Ada Standard by either meeting the pass criteria given for the test or by showing that the test is inapplicable to the implementation. The applicability of a test to an implementation is considered each time the implementation is validated. A test that is inapplicable for one validation is not necessarily inapplicable for a subsequent validation. Any test that was determined to contain an illegal language construct or an erroneous language construct is withdrawn from the ACVC and, therefore, is not used in testing a compiler. The tests withdrawn at the time of this validation are given in Appendix D.

CHAPTER 2

CONFIGURATION INFORMATION

2.1 CONFIGURATION TESTED

The candidate compilation system for this validation was tested under the following configuration:

Compiler:

DACS-80386 Protected Mode, Version 4.3

ACVC Version:

1.10

Certificate Number: 890324S1.10068

Host Computer:

Machine:

MicroVAX II

Operating System: MicroVMS, Version 4.6

Memory Size:

16MBytes

Target Computer:

Machine:

Board:

Intel 80386 iSBC 386/21

CPU:

80386

Bus:

MULTIEUS 1

I/0:

8251

Timer:

8254

Operating System: Bare

Memory Size:

1MByte

Communications Network: The host computer, a MicroVAX II, was linked via ETHERNET to an IBM PC XT which is connected to the target computer, an Intel 80386 iSBC 386/21, via an in-

circuit emulator (ICE386).

2.2 IMPLEMENTATION CHARACTERISTICS

One of the purposes of validating compilers is to determine the behavior of a compiler in those areas of the Ada Standard that permit implementations to differ. Class D and E tests specifically check for such implementation differences. However, tests in other classes also characterize an implementation. The tests demonstrate the following characteristics:

a. Capacities.

- (1) The compiler correctly processes a compilation containing 723 variables in the same declarative part. (See test D29002K.)
- (2) The compiler correctly processes tests containing loop statements nested to 65 levels. (See tests D55A03A..H (8 tests).)
- (3) The compiler rejects tests containing block statements nested to 65 levels. (See test D56001B.)
- (4) The compiler correctly processes tests containing recursive procedures separately compiled as subunits nested to 17 levels. (See tests D64005E..G (3 tests).)

b. Predefined types.

(1) This implementation supports the additional predefined types SHORT_INTEGER, LONG_FLOAT, and LONG_INTEGER in the package STANDARD. (See tests B86001T..Z (7 tests).)

c. Expression evaluation.

The order in which expressions are evaluated and the time at which constraints are checked are not defined by the language. While the ACVC tests do not specifically attempt to determine the order of evaluation of expressions, test results indicate the following:

- (1) All of the default initialization expressions for record components are evaluated before any value is checked for membership in a component's subtype. (See test C32117A.)
- (2) Assignments for subtypes are performed with the same precision as the base type. (See test C35712B.)

- (3) This implementation uses no extra bits for extra precision and uses all extra bits for extra range. (See test C35903A.)
- (4) NUMERIC_ERROR is raised when an integer literal operand in a comparison or membership test is outside the range of the base type. (See test C45232A.)
- (5) NUMERIC_ERROR is raised when a literal operand in a fixed-point comparison or membership test is outside the range of the base type. (See test C45252A.)
- (6) Underflow is gradual. (See tests C45524A..2 (26 tests).)

d. Rounding.

The method by which values are rounded in type conversions is not defined by the language. While the ACVC tests do not specifically attempt to determine the method of rounding, the test results indicate the following:

- (1) The method used for rounding to integer is round to even. (See tests C46012A..Z (26 tests).)
- (2) The method used for rounding to longest integer is round to even. (See tests C46012A..Z (26 tests).)
- (3) The method used for rounding to integer in static universal real expressions is round away from zero. (See test C4A014A.)

e. Array types.

An implementation is allowed to raise NUMERIC_ERROR or CONSTRAINT_ERROR for an array having a 'LENGTH that exceeds STANDARD.INTEGER'LAST and/or SYSTEM.MAX_INT. For this implementation:

- (1) Declaration of an array type or subtype declaration with more than SYSTEM.MAX_INT components raises NUMERIC_ERROR. (See test C36003A.)
- (2) NUMERIC_ERROR is raised when 'LENGTH is applied to an array type with INTEGER'LAST + 2 components. (See test C36202A.)
- (3) NUMERIC_ERROR is raised when 'LENGTH is applied to an array type with SYSTEM.MAX_INT + 2 components. (See test C36202B.)

- (4) A packed BOOLEAN array having a 'LENGTH exceeding INTEGER'LAST raises NUMERIC_ERROR when declaring two packed Boolean arrays with INTEGER'LAST + 3 components. (See test C52103X.)
- (5) A packed two-dimensional BOOLEAN array with more than INTEGER'LAST components raises NUMERIC_ERROR when the array type is declared. (See test C52104Y.)
- (6) A null array with one dimension of length greater than INTEGER'LAST may raise NUMERIC ERROR or CONSTRAINT ERROR either when declared or assigned. Alternatively, an implementation may accept the declaration. However, lengths must match in array slice assignments. This implementation raises NUMERIC ERROR when the array type is declared. (See test E52103Y.)
- (7) In assigning one-dimensional array types, the expression is evaluated in its entirety before CONSTRAINT_ERROR is raised when checking whether the expression's subtype is compatible with the target's subtype. (See test C52013A.)
- (8) In assigning two-dimensional array types, the expression is not evaluated in its entirety before CONSTRAINT_ERROR is raised when checking whether the expression's subtype is compatible with the target's subtype. (See test C52013A.)

f. Discriminated types.

(1) In assigning record types with discriminants, the expression is evaluated in its entirety before CONSTRAINT_ERROR is raised when checking whether the expression's subtype is compatible with the target's subtype. (See test C52013A.)

g. Aggregates.

- (1) In the evaluation of a multi-dimensional aggregate, the test results indicate that all choices are evaluated before checking against the index type. (See tests C43207A and C43207B.)
- (2) In the evaluation of an aggregate containing subaggregates, not all choices are evaluated before being checked for identical bounds. (See test E43212B.)
- (3) CONSTRAINT_ERROR is raised before all choices are evaluated when a bound in a non-null range of a non-null aggregate does not belong to an index subtype. (See test E43211B.)

h. Pragmas.

(1) The pragma INLINE is supported for functions or procedures. (See tests LA3004A..B (2 tests), EA3004C..D (2 tests), and CA3004E..F (2 tests).)

i. Generics.

(1) Generic specifications and bodies cannot be compiled in separate compilations. (See tests CA2009C, CA2009F, BC3204C, and BC3205D.)

Generic package declarations and bodies can be compiled in separate compilations so long as no instantiations of those units precede the bodies. This compiler requires that a generic unit's body be compiled prior to instantiation, and so the unit containing the instantiations is rejected.

- (2) Generic unit bodies and their subunits can be compiled in separate compilations. (See test CA3011A.)
- (3) Generic subprogram declarations and bodies can be compiled in separate compilations. (See test CA1012A.)
- (4) Generic library subprogram specifications and bodies can be compiled in separate compilations. (See test CA1012A.)
- (5) Generic non-library subprogram bodies cannot be compiled in separate compilations from their stubs. (See test CA2009F.)
- (6) Generic package declarations and bodies cannot be compiled in separate compilations. (See tests CA2009C, BC3204C, and BC3205D.)
- (7) Generic library package specifications and bodies cannot be compiled in separate compilations. (See tests BC3204C and BC3205D.)
- (8) Generic non-library package bodies as subunits cannot be compiled in separate compilations. (See test CA2009C.)
- (9) Generic unit bodies and their subunits can be compiled in separate compilations. (See test CA3011A.)

j. Input and output.

(1) The package SEQUENTIAL IO cannot be instantiated with

- unconstrained array types and record types with discriminants without defaults. (See tests EE2201D and EE2201E.)
- (2) The package DIRECT_IO cannot be instantiated with unconstrained array types and record types with discriminants without defaults. (See tests EE2401D and EE2401G.)
- (3) USE_ERROR is raised when Mode IN_FILE is not supported for the operation of CREATE for SEQUENTIAL_IO. (See test CE2102D.)
- (4) USE_ERROR is raised when Mode IN_FILE is not supported for the operation of CREATE for DIRECT_IO. (See test CE2102I.)
- (5) USE_ERROR is raised when Mode IN_FILE is not supported for the operation of CREATE for text files. (See test CE3102E.)
- (6) Modes IN_FILE and OUT_FILE not are supported for text files. (See tests CE3102E and CE3102I.)
- (7) RESET and DELETE operations are not supported for SEQUENTIAL_IO. (See tests CE2102G and CE2102X.)
- (8) RESET and DELETE operations are not supported for DIRECT_IO. (See tests CE2102K and CE2102Y.)
- (9) RESET and DELETE operations are not supported for text files. (See tests CE3102F..G (2 tests), CE3104C, CE3110A, and CE3114A.)
- (10) Only one internal file can be associated with each external file for sequential files when writing only. (See tests CE2102L.)
- (11) More than one internal file can be associated with the each external file for direct files when writing or reading. (See tests CE2107F.)

CHAPTER 3

TEST INFORMATION

3.1 TEST RESULTS

Version 1.10 of the ACVC comprises 3717 tests. When this compiler was tested, 43 tests had been withdrawn because of test errors. The AVF determined that 654 tests were inapplicable to this implementation. All inapplicable tests were processed during validation testing except for 201 executable tests that use floating-point precision exceeding that supported by the implementation and 245 executable tests that use file operations not supported by the implementation. Modifications to the code, processing, or grading for 73 tests were required to successfully demonstrate the test objective. (See section 3.6.)

The AVF concludes that the testing results demonstrate acceptable conformity to the Ada Standard.

3.2 SUMMARY OF TEST RESULTS BY CLASS

RESULT		TOTAL					
	A	В	C	D	<u> </u>	L	
Passed	123	1132	1688	16	15	46	3020
Inapplicable	6	6	628	1	13	0	654
Withdrawn	1	2	34	0	6	0	43
TOTAL	130	1140	2350	17	34	46	3717

3.3 SUMMARY OF TEST RESULTS BY CHAPTER

RESULT							CHA	PTER						TOTAL
	2	3	4	5	6		8	9	<u>10</u>	_11	12	<u>13</u>	14	
Passed	195	572	554	247	172	9 9	161	332	135	36	250	191	76	3020
Inapplicable	17	77	126	1	0	0	5	1	2	0	2	178	245	654
Wdrn	1	1	0	0	0	0	0	1	0	0	1	35	4	43
TOTAL	213	650	680	248	172	99	166	334	137	36	253	404	325	3717

3.4 WITHDRAWN TESTS

The following 43 tests were withdrawn from ACVC Version 1.10 at the time of this validation:

A39005G	B97102E	BC3009B	CD2A62D	CD2A63A	CD2A63B
CD2A63C	CD2A63D	CD2A66A	CD2A66B	CD2A66C	CD2A66D
CD2A73A	CD2A73B	CD2A73C	CD2A73D	CD2A76A	CD2A76B
CD2A76C	CD2A76D	CD2A81G	CD2A83G	CD2A84M	CD2A84N
CD2B15C	CD2D11B	CD5007B	CD50110	CD7105A	CD7203B
CD7204B	CD7205C	CD7205D	CE2107I	CE3111C	CE3301A
CE3411B	E28005C	ED7004B	ED7005C	ED7005D	ED7006C
ED7006D	====				

See Appendix D for the reason that each of these tests was withdrawn.

3.5 INAPPLICABLE TESTS

Some tests do not apply to all compilers because they make use of features that a compiler is not required by the Ada Standard to support. Others may depend on the result of another test that is either inapplicable or withdrawn. The applicability of a test to an implementation is considered each time a validation is attempted. A test that is inapplicable for one validation attempt is not necessarily inapplicable for a subsequent attempt. For this validation attempt, 654 tests were inapplicable for the reasons indicated:

The following 201 tests are not applicable because they have floating-point type declarations requiring more digits than SYSTEM.MAX DIGITS:

C24113L..Y (14 tests) C35705L..Y (14 tests) C35706L..Y (14 tests) C35707L..Y (14 tests)

```
C35708L..Y (14 tests) C35802L..Z (15 tests)
C45241L..Y (14 tests) C45321L..Y (14 tests)
C45421L..Y (14 tests) C45521L..Z (15 tests)
C45524L..Z (15 tests) C45621L..Z (15 tests)
C45641L..Y (14 tests) C46012L..Z (15 tests)
```

C24113I..K (3 tests) are not applicable because the line length of the input file must not exceed 126 characters.

A39005E, C87B62C, CD1009L, CD1C03F, CD2D11A, and CD2D13A (6 tests) are not applicable because 'SMALL clause is not supported.

C35508I, C35508J, C35508M, C35508N, AD1C04D, AD3015C, AD3015F, AD3015H, AD3015K, CD1C04B, CD1C04C, CD1C04E, CD2A23C, CD2A23D, CD2A24C, CD2A24D, CD2A24G, CD2A24H, CD3015A, CD3015B, CD3015D, CD3015E, CD3015G, CD3015I, CD3015J, CD3015L, CD4051A, CD4051B, CD4051C, and CD4051D (30 tests) are not applicable because this implementation does not support the specified change in representation for derived types.

C35702A and B86001T are not applicable because this implementation supports no predefined type SHORT_FLOAT.

B86001Z is not applicable because this implementation supports no predefined floating-point type with a name other than FLOAT, LONG FLOAT, or SHORT FLOAT.

B86001X, C45231D, and CD7101G are not applicable because this implementation does not support any predefined integer type with a name other than INTEGER, LONG_INTEGER, or SHORT_INTEGER.

C4A013B is not applicable because the evaluation of an expression involving 'MACHINE_RADIX applied to the most precise floating-point type would raise an exception; since the expression must be static, it is rejected at compile time.

D56001B uses 65 levels of block nesting which exceeds the capacity of the compiler.

B86001Y is not applicable because this implementation supports no predefined fixed-point type other than DURATION.

C45531M, C45531N, C45532M, and C45532N use fine 48 bit fixed point base types which are not supported by this compiler.

C455310, C45531P, C45532O, and C45532P use coarse 48 bit fixed point base types which are not supported by this compiler.

C96005B is not applicable because there are no values of type DURATION'BASE that are outside the range of DURATION.

CA2009C is not applicable because this implementation does not

permit compilation of generic non-library package bodies in separate files from their specifications.

CA2009F is not applicable because this implementation does not permit compilation of generic non-library subprogram bodies in separate files from their specifications.

BC3204C and BC3205D are not applicable because this implementation does not permit compilation of generic library package bodies in separate files from their specifications.

CD1009C, CD2A41A..B, CD2A41E, and CD2A42A..J (14 tests) are not applicable because this implementation does not support the 'SIZE clause for floating-point types.

CD2A51C, CD2A52A..D, CD2A52G..J, CD2A53A..E, CD2A54A..D, CD2A54G..J, and ED2A56A (23 tesus) are not applicable because this implementation does not support the 'SIZE clause for a fixed-point types.

CD2A61A..L, CD2A62A..C, CD2A64A..D, CD2A65A..D, CD2A71A..D, CD2A72A..D, CD2A74A..D, and CD2A75A..D (39 tests) are not applicable because this implementation does not support the 'SIZE clause for an array type which does not imply compression of intercomponent gaps.

CD2A84B..I and CD2A84K..L (10 tests) are not applicable because this implementation does not support the 'SIZE clause for an access type.

CD5003B..I, CD5011A, CD5011C, CD5011E, CD5011G, CD5011I, CD5011K, CD5011M, CD5011Q, CD5012A..B, CD5012E..F, CD5012I, CD5012M, CD5013A, CD5013C, CD5013E, CD5013G, CD5013I, CD5013K, CD5013M, CD5013O, CD5014T, and CD5014V..Z (36 tests) are not applicable because this implementation does not support non-static address clauses for a variable.

CD5011B, CD5011D, CD5011F, CD5011H, CD5011L, CD5011N, CD5011R, CD5011S, CD5012C..D, CD5012G..H, CD5012L, CD5013B, CD5013D, CD5013F, CD5013H, CD5013L, CD5013N, CD5013R, and CD5014U (21 tests) are not applicable because this implementation does not support non-static address clauses for a constant.

CD5012J, CD5013S, and CD5014S (3 tests) are not applicable because this implementation does not support non-static address clauses.

CD4041A is not applicable because this implementation does not support the alignment clauses for alignments other than SYSTEM.STORAGE_UNIT for record representation clauses.

The following 242 tests are inapplicable because sequential, text, and direct access files are not supported:

```
CE2102G..H (2 tests)
CE2102A..C (3 tests)
CE2102K
                           CE2102N..Y (12 tests)
CE2103C..D (2 tests)
                           CE2104A..D (4 tests)
CE2105A..B (2 tests)
                           CE2106A..B (2 tests)
CE2107A..H (8 tests)
                           CE2107L
CE2108A..H (8 tests)
                           CE2109A..C (3 tests)
CE2110A..D (4 tests)
                           CE2111A..I (9 tests)
                           CE2201A..C (3 tests)
CE2115A..B (2 tests)
                           CE2201F..N (9 tests)
EE2201D..E (2 tests)
                           CE2205A
CE2204A..D (4 tests)
CE2208B
                           CE2401A..C (3 tests)
EE2401D
                           CE2401E..F (2 tests)
EE2401G
                           CE2401H..L (5 tests)
                           CE2405B
CE2404A..B (2 tests)
CE2406A
                           CE2407A..B (2 tests)
CE2408A..B (2 tests)
                           CE2409A..B (2 tests)
CE2410A..B (2 tests)
                           CE2411A
CE3102A..B (2 tests)
                           EE3102C
CE3102F..H (3 tests)
                           CE3102J..K (2 tests)
                           CE3104A..C (3 tests)
CE3103A
CE3107B
                           CE3108A..B (2 tests)
CE3109A
                           CE3110A
                           CE3111D..E (2 tests)
CE3111A..B (2 tests)
                           CE3114A..B (2 tests)
CE3112A..D (4 tests)
                           EE3203A
CE3115A
CE3208A
                           EE3301B
CE3302A
                           CE3305A
CE3402A
                           EE3402B
CE3402C..D (2 tests)
                           CE3403A..C (3 tests)
                           CE3404B..D (3 tests)
CE3403E..F (2 tests)
CE3405A
                           EE3405B
                           CE3406A..D (4 tests)
CE3405C..D (2 tests)
                           CE3408A..C (3 tests)
CE3407A..C (3 tests)
                           CE3409C..E (3 tests)
CE3409A
EE3409F
                           CE3410A
CE3410C..E (3 tests)
                           EE3410F
CE3411A
                           CE3411C
CE3412A
                           EE3412C
                           CE3413C
CE3413A
                           CE3603A
CE3602A..D (4 tests)
CE3604A..B (2 tests)
                           CE3605A..E (5 tests)
CE3606A..B (2 tests)
                           CE3704A..F (6 tests)
CE3704M..O (3 tests)
                           CE3706D
CE3706F..G (2 tests)
                           CE3804A..P (16 tests)
CE3805A..B (2 tests)
                           CE3806A..B (2 tests)
CE3806D..E (2 tests)
                           CE3806G..H (2 tests)
CE3905A..C (3 tests)
                           CE3905L
                           CE3906E..F (2 tests)
CE3906A..C (3 tests)
```

CE2103A, CE2103B, and CE3107A (3 tests) are not applicable because these tests expect that CREATE ..., ..., <bad file name> will cause

only NAME_ERROR to be raised; but for implementations that do not support file I/O, it is preferable that USE_ERROR be raised, and that is what this implementation does.

3.6 TEST, PROCESSING, AND EVALUATION MODIFICATIONS

It is expected that some tests will require modifications of code, processing, or evaluation in order to compensate for legitimate implementation behavior. Modifications are made by the AVF in cases where legitimate implementation behavior prevents the successful completion of an (otherwise) applicable test. Examples of such modifications include: adding a length clause to alter the default size of a collection; splitting a Class B test into subtests so that all errors are detected; and confirming that messages produced by an executable test demonstrate conforming behavior that was not anticipated by the test (such as raising one exception instead of another).

Modifications were required for 73 tests.

The following 64 tests were split because syntax errors at one point resulted in the compiler not detecting other errors in the test:

B22003A	B26001A	B26002A	B26005A	B28001D	B29001A
B2A003B	B2A003C	B33301B	B35101A	B37106A	B37301B
B37302A	B38003A	B38003B	B38009A	B38009B	B51001A
B53009A	B54A01C	B54A01H	B55A01A	B61001C	B61001D
B61001F	B61001H	B61001I	B61001M	B61001R	B61001S
B61001W	B67001H	B91001A	B91002A	B91002B	B91002C
B91002D	B91002E	B91002F	B91002G	B91002H	B91002I
B91002J	B91002K	B91002L	B95030A	B95061A	B95061F
B95061G	B95077A	B97103E	B97104G	BA1101B	BC1109A
BC1109C	BC1109D	BC1202A	BC1202B	BC1202E	BC1202F
BC1202G	BC2001D	BC2001E	BC3009A		

The following 9 tests contain modifications to their respective source code files:

AD7006A wrongly assumes that an expression in an assignment statement is of type universal integer, and so should deliver a correct result that is in the range of type INTEGER. This implementation is correct in treating the expression a being of type INTEGER; an exception is raised because the operand SYSTEM.MEMORY_SIZE exceeds INTEGER'LAST.

The implementer's modification of this test (declaring the assigned -- variable I to be of type LONG_INTEGER) is ruled to be an acceptable means to passing this test by the AJPO.

C34007A, C34007D, C34007G, C34007J, C34007M, C34007P, C34007S, and C87B62B (8 tests) The AVO accepts the implementer's argument that, without there being a STORAGE_SIZE length clause for an access type, the meaning of the attribute 'STORAGE_SIZE is undefined for

that a type.

3.7 ADDITIONAL TESTING INFORMATION

3.7.1 Prevalidation

Prior to validation, a set of test results for ACVC Version 1.10 produced by the DACS-80386 Protected Mode, Version 4.3 compiler was submitted to the AVF by the applicant for review. Analysis of these results demonstrated that the compiler successfully passed all applicable tests, and the compiler exhibited the expected behavior on all inapplicable tests.

3.7.2 Test Method

Testing of the DACS-80386 Protected Mode, Version 4.3 compiler using ACVC Version 1.10 was conducted on-site by a validation team from the AVF. The configuration in which the testing was performed is described by the following designations of hardware and software components:

Host computer: MicroVAX II

Host operating system: MicroVMS, Version 4.6
Target computer: Intel 80386 iSBC 386/21

Target operating system: Bare

Compiler: DACS-80386 Protected Mode, Version 4.3

Pre-linker: DACS-80386 LINKER
Assembler: INTEL ASM386
Linker: INTEL BND386
Loader/Downloader: INTEL BLD386

Runtime System: DDC-I RTS

The host computer, a MicroVAX II, was linked via ETHERNET to an IBM PC XT which is connected to the target computer, an Intel 80386 iSBC 386/21, via an in-circuit emulator (ICE386).

A magnetic tape containing all tests except for withdrawn tests was taken on-site by the validation team for processing. Tests that make use of implementation-specific values were customized before being written to the magnetic tape. Tests requiring modifications during the prevalidation testing were included in their modified form on the magnetic tape.

TEST INFORMATION

The contents of the magnetic tape were loaded directly onto the host computer.

After the test files were loaded to disk, the full set of tests was compiled and linked on the MicroVAX II, and all executable tests were run on the Intel 80386 iSBC 386/21. Results were printed from the host

computer.

The compiler was tested using command scripts provided by DDC-I, Inc. and reviewed by the validation team. The compiler was tested using the following option settings. See Appendix E for a complete listing of the compiler options for this implementation.

/LIST /NOSAVE

Tests were compiled, linked, and executed (as appropriate) using a single host and target computer. Test output, compilation listings, and job logs were captured on magnetic tape and archived at the AVF. Selected listings examined on-site by the validation team were also archived.

3.7.3 Test Site

Testing was conducted at Phoenix, Arizona and was completed on 24 March 1989.

APPENDIX A

DECLARATION OF CONFORMANCE

DDC-I, Inc. has submitted the following Declaration of Conformance concerning the DACS-80386 Protected Mode, Version 4.3.

DECLARATION OF CONFORMANCE

Compiler Implementer:

DDC-I, Inc.

Ada Validation Facility:

National Institute of Standards and

Technology

ACVC Version:

ACVC 1.10

Base Configuration

Base Compiler Name:

DACS-80386 Protected Mode

Version: 4.3

Host Architecture - ISA:

MicroVax II OS&VER: MicroVMS 4.6

Target Architecture - ISA: Intel Multibus I 80386 iSBC 386/21

OS&VER: Bare

Derived Compiler Registration

For the following derived compilers, both the input files for the ACVC tests and the result files for the ACVC tests are the same as that for the base configuration.

Base Compiler Name:

DACS-80386 Protected Mode

Version: 4.3

Host Architecture - ISA:

Complete DEC Family of Vax,

Vax Station, and MicroVax Computers

OS&VER: Vax/VMS 4.6 & 5.0

or MicroVMS 4.6 & 5.0

Target Architecture - ISA: Intel Multibus I 80386 iSBC 386/21

OS&VER: Bare

Base Compiler Name:

DACS-80386 Protected Mode

Version: 4.3

Host Architecture - ISA:

Complete DEC Family of Vax,

Vax Station, and MicroVax Computers

OS&VER: Vax/VMS 4.6 & 5.0

or MicroVMS 4.6 & 5.0

Target Architecture - ISA: Intel Multibus II 80386 iSBC 386/116

OS&VER: Bare

Implementer's Declaration

I, the undersigned, representing DDC-I, Inc. have implemented no deliberate extensions to the Ada Language Standard ANSI/MIL-STD-1815A in the compiler(s) listed in this declaration. I declare the DDC-I, Inc. is the owner of record of the Ada language compiler(s) listed above and, as such, is responsible for maintaining said compiler(s) in conformance to ANSI/MIL-STD-All certificates and registrations for Ada language compiler(s) listed in this declaration shall be made only in the owner's corporate name.

Silvert Lee Silverthorn, President - DDC-I,

Owner's Declaration

I, the undersigned, representing DDC-I, Inc. take full responsibility for implementation and maintenance of the Ada compiler(s) listed above, and agree to the public disclosure of the final Validation Summary Report. I further agree to continue to comply with the Ada trademark policy, as defined by the Ada Joint Program Office. I declare that all of the Ada language compilers listed, and their host/target performance are in compliance with the Ada Language Standard ANSI/MIL-STD-1815A. have reviewed the Validation Summary Report for the compiler(s) and concur with the contents.

Lee Silverthorn, President - DDC-I, Inc.

APPENDIX B

APPENDIX F OF THE Ada STANDARD

The only allowed implementation dependencies correspond to implementation-dependent pragmas, to certain machine-dependent conventions as mentioned in chapter 13 of the Ada Standard, and to certain allowed restrictions on representation clauses. The implementation-dependent characteristics of the DACS-80386 Protected Mode, Version 4.3 compiler, as described in this Appendix, are provided by DDC-I, Inc.. Unless specifically noted otherwise, references in this appendix are to compiler documentation and not to this report. Implementation-specific portions of the package STANDARD, which are not a part of Appendix F, are:

This appendix describes the implementation-dependent characteristics of DACS-80X86® as required in Appendix F of the Ada Reference Manual (ANSI/MIL-STD-1815A).

F.1 Implementation-Dependent Pragmas

This section describes all implementation defined pragmas.

F.1.1 Pragma INTERFACE_SPELLING

This pragma allows an Ada program to call a non-Ada program whose name contains characters that would be an invalid Ada subprogram identifier. This pragma must be used in conjunction with pragma INTERFACE, i.e., pragma INTERFACE must be specified for the non-Ada subprogram name prior to using pragma INTERFACE_SPELLING.

The pragma has the format:

where the subprogram name is that of one previously given in pragma INTERFACE and the string literal is the exact spelling of the interfaced subprogram in its native language. This pragma is only required when the subprogram name contains invalid characters for Ada identifiers.

Example:

F.1.2 Pragma INTERRUPT HANDLER

This pragma will cause the compiler to generate fast interrupt handler entries instead of the normal task calls for the entries in the task in which it is specified. It has the format:

pragma INTERRUPT HANDLER;

The pragma must appear as the first thing in the specification of the task object. The task must be specified in a package and not a procedure. See section F.6.2 for more details and restrictions on specifying address clauses for task entries.

F.1.3 Pragma LT_STACK_SPACE

This pragma sets the size of a library task stack segment. The pragma has the format:

pragma LT_STACK_SPACE (T, N);

where T denotes either a task object or task type and N designates the size of the library task stack segment in words.

The library task's stack segment defaults to the size of the library task stack. The size of the library task stack is normally specified via the representation clause

for T'STORAGE SIZE use N;

The size of the library task stack segment determines how many tasks can be created which are nested within the library task. All tasks created within a library task will have their stacks allocated from the same segment as the library task stack. Thus, pragma LT_STACK_SPACE must be specified to reserve space within the library task stack segment so that nested tasks' stacks may be allocated.

The following restrictions are places on the use of LT STACK SPACE:

- 1) It must be used only for library tasks.
- 2) It must be placed immediately after the task object or type name declaration.
- 3) The library task stack segment size (N) must be greater than or equal to the library task stack size.

F.2 Implementation-Dependent Attributes

No implementation-dependent attributes are defined.

F.3 Package SYSTEM

The specification of the package SYSTEM for the 80x86 Real Address Mode and 80286 Protected Mode systems is:

```
package System is
           Word
                        is new Integer;
   type
           LongWord
                        is new Long Integer;
   type
           UnsignedWord is range 0..65535;
   type
           UnsignedWord'SIZE use 16;
   for
   subtype SegmentId
                         is UnsignedWord;
           Address is record
   type
           offset : UnsignedWord;
           segment : SegmentId;
      end record;
   subtype Priority
                       is Word range 0..31;
           Name
                       is (1APX86,
   type
                           iAPX186,
                           1APX286.
                           iAPX386);
   System Name
                       constant Name := iAPX186;
   Storage_Unit :
                      constant
                                      := 16;
                      constant
                                      := 1 048 576;
   Memory_Size :
   Min Int
                      constant
                                     := -\overline{2}_{147}483647-1;
   Max Int
                                      := 2 147 483 647;
                      constant
   Max Digits :
                                      := 15;
                      constant
   Max Mantissa :
                                      := 31;
                      constant
                                      := 2.0 / MAX_INT;
                       constant
   Fine_Delta
                :
   Tick
                                      := 0.000 000 125;
                       constant
   type
           Interface_Language is (PLM86, ASM86);
           ExceptionId is record
   type
           unit number : UnsignedWord;
           unique number : UnsignedWord;
       end record;
          TaskValue is new Integer;
   type
   type
          AccTaskValue is access TaskValue;
   type
           Semaphore
                       is
       record
           counter : UnsignedWord;
                   : TaskValue:
           first
                    : TaskValue;
           last
       end record;
   InitSemaphore : constant Semaphore'(1, 0, 0);
end SYSTEM:
```

FROM DOCTED INC. PRODUCT.

The package SYSTEM specification for the 80386 Protected Mode system is:

```
package System is
                      is new Short Integer;
  type
          Word
          DWord
                       is new Integer;
  type
                       is new Long Integer
  type
          QWord
         UnsignedWord is range 0..65535;
  type
  for
          UnsignedWord'SIZE use 16;
  type UnsignedDword is range 0..16#7FFF FFFF#;
for UnsignedDword'SIZE use 32;
  subtype SegmentId
                        is UnsignedWord;
          Address is record
  type
          offset : UnsignedDWord;
          segment : SegmentId;
  end record;
                     is Word range 0..31;
  subtype Priority
  type
         Name
                      is (iAPX86,
                          1APX186,
                          1APX286,
                          1APX386,
                          1APX386 SM.
                          1APX386 FM);
  Interface_Language is (PLM86, ASM86,
  type
                                C86, C86 REVERSE);
  type
          ExceptionId is record
          unit number : UnsignedDWord;
          unique_number : UnsignedDWord;
  end record;
```

TaskValue is new Integer;

AccTaskValue is access TaskValue;

type

type

type Semaphore is

record

counter : UnsignedWord;
first : TaskValue;
last : TaskValue;

end record;

InitSemaphore : constant Semaphore'(1, 0, 0);

end SYSTEM;

F.4 Representation Clauses

The DACS-80x86® fully supports the 'SIZE representation for derived types. The representation clauses that are accepted for non-derived types are described in the following subsections.

F.4.1 Length Clause

Some remarks on implementation dependent behavior of length clauses are necessary:

- When using the SIZE attribute for discrete types, the maximum value that can be specified is 16 bits.
- SIZE is only obeyed for discrete types when the type is a part of a composite object, e.g. arrays or records, for example:

type byte is range 0..255; for byte'size use 8;

sixteen_bits_allocated : byte; -- one word -- allocated

eight_bit_per_element : array(0..7) of byte;

-- four words -- allocated

type rec is record

cl,c2: byte; -- eight bits per

-- component

end record;

- Using the STORAGE_SIZE attribute for a collection will set an upper limit on the total size of objects allocated in this collection. If further allocation is attempted, the exception STORAGE ERROR is raised.
- When STORAGE_SIZE is specified in a length clause for a task, the process stack area will be of the specified size. The process stack area will be allocated inside the "standard" stack segment.

F.4.2 Enumeration Representation Clause

Enumeration representation clauses may specify representations in the range of INTEGER'FIRST + 1..INTEGER'LAST - 1.

F.4.3 Record Representation Clauses

When representation clauses are applied to records the following restrictions are imposed:

- the component type is a discrete type different from LONG INTEGER
- the component type is an array with a discrete element type different from LONG INTEGER
- the storage unit is 16 bits
- a record occupies an integral number of storage units
- a record may take up a maximum of 32K storage units
- a component must be specified with its proper size (in bits), regardless of whether the component is an array or not.
- if a non-array component has a size which equals or exceeds one storage unit (16 bits) the component must start on a storage unit boundary, i.e. the component must be specified as:

component at N range 0..16 * M - 1;

where N specifies the relative storage unit number (0,1,...) from the beginning of the record, and M the required number of storage units (1,2,...)

- the elements in an array component should always be wholly contained in one storage unit

- if a component has a size which is less than one storage unit, it must be wholly contained within a single storage unit:

component at N range X .. Y;

where N is as in previous paragraph, and O <= X <= Y <= 15

When dealing with PACKED ARRAY the following should be noted:

- the elements of the array are packed into 1,2,4 or 8 bits

If the record type contains components which are not covered by a component clause, they are allocated consecutively after the component with the value. Allocation of a record component without a component clause is always aligned on a storage unit boundary. Holes created because of component clauses are not otherwise utilized by the compiler.

F.4.3.1 Alignment Clauses

Alignment clauses for records are implemented with the following characteristics:

- If the declaration of the record type is done at the outermost level in a library package, any alignment is accepted.
- If the record declaration is done at a given static level (higher than the outermost library level, i.e., the permanent area), only word alignments are accepted.
- Any record object declared at the outermost level in a library package will be aligned according to the alignment clause specified for the type. Record objects declared elsewhere can only be aligned on a word boundary. If the record type has been associated a different alignment, an error message will be issued.
- If a record type with an associated alignment clause is used in a composite type, the alignment is required to be one word; an error message is issued if this is not the case.

F.5 Implementation-Dependent Names for Implementation -Dependent Components

None defined by the compiler.

F.6 Address Clauses

This section describes the implementation of address clauses and what types of entities may have their address specified by the user.

F.6.1 Objects

Address clauses are supported for scalar and composite objects whose size can be determined at compile time.

F.6.2 Task Entries

The implementation supports two methods to equate a task entry to a hardware interrupt through an address clause:

- 1) Direct transfer of control to a task accept statement when an interrupt occurs (requires use of the pragma INTERRUPT_HANDLER).
- 2) Mapping of an interrupt onto a normal conditional entry call, i.e., the entry can be called from other tasks without special actions, as well as being called when an interrupt occurs.

F.6.2.1 Fast Interrupt Entry

Directly transferring control to an accept statement when an interrupt occurs requires the implementation dependent pragma INTERRUPT_HANDLER to tell the compiler that the task is an interrupt handler. By using this pragma, the user is agreeing to place certain restrictions on the task in order to speed up the software response to the hardware interrupt. Consequently, use of this method to capture interrupts is much more efficient than the general method.

The following constraints are placed on the task:

- 1) It must be a task object, i.e., not a task type.
- 2) The pragma must appear first in the specification of the task object.
- 3) All entries of the task object must be single entries with no parameters.
- 4) The entries must not be called from any task.

5) The body of the task object must not contain anything other than simple accept statements (potentially enclosed in a loop) referencing only global variables, i.e., no local variables. In the statement list of a simple accept statement, it is allowed to call normal, single and parameterless, entries of other tasks, but no other tasking constructs are allowed. The call to another task entry, in this case, will not lead to an immediate task context switch, but will return to the caller when complete. Once the accept is completed, the task priority rules will be obeyed, and a context switch may occur.

F.6.2.2 Normal Interrupt Entry

Mapping of an interrupt onto a normal conditional entry call puts the following constraints on the involved entries and tasks:

- 1) The affected entries must be defined in a task object only (not a task type).
- 2) The entries must be single and parameterless.


Any interrupt entry, which is not found in an interrupt handler (first method), will lead to an update of the interrupt vector segment at link time. The interrupt vector segment will be updated to point to the interrupt routine generated by the compiler to make the task entry call. The interrupt vector segment is part of the user configurable data and consists of a segment, preset to the "standard" interrupt routines (e.g., constraint error). See section 7.2.15 (RTS Configuration of Interrupt Vector Ranges) for details on how to specify interrupt vector ranges.

F.7 Unchecked Conversions

Unchecked conversion is only allowed between objects of the same "size".

F.8 Input/Output Packages

In many embedded systems, there is no need for a traditional I/O system, but in order to support testing and valudation, DDC-I has developed a small terminal oriented I/O system. This I/O system consists essentially of TEXT_IO, adapted with respect to handling only a terminal and not file I/O (file I/O will cause a USE error to be raised), and a low level package called TERMINAL_DRIVER. A BASIC_IO package has been provided for convenience purposes, forming an interface between TEXT_IO and TERMINAL_DRIVER as illustrated in the following figure.

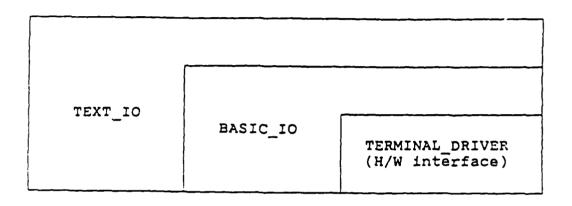

The TERMINAL_DRIVER package is the only package that is target dependent, i.e., it is the only package that need be changed when changing communications controllers. The actual body of the TERMINAL_DRIVER is written in assembly language, but an Ada interface to this body is provided. A user can also call the terminal driver routines directly, i.e., from an assembly language routine. FEXT_IO and BASIC_IO are written completely in Ada and need not be changed.

BASIC_IO provides a mapping between TEXT_IO control characters and ASCII as follows:

TEXT_IO	ASCII Character	
LINE_TERMINATOR PAGE_TERMINATOR FILE_TERMINATOR NEW_LINE	ASCII.CR ASCII.FF	
	ASCII.EM (ctrl Z) ASCII.LF	

The services provided by the terminal driver are:

- 1) Reading a character from the communications port.
- 2) Writing a character to the communications port.

The terminal driver comes in two versions: one which supports tasking, i.e., asynchronous I/O, and a version which assumes no tasking.

F.8.1 Package TEXT_IO The specification of package TEXT IO: pragma page; with BASIC IO; with IO EXCEPTIONS; package TEXT IO is type FILE TYPE is limited private; type FILE_MODE is (IN FILE, OUT_FILE); COUNT is range O .. INTEGER'LAST; subtype POSITIVE_COUNT is COUNT range 1 .. COUNT'LAST; UNBOUNDED: constant COUNT:= 0; -- line and page length -- max. size of an integer output field 2#...# subtype FIELD is INTEGER range 0 .. 35; subtype NUMBER BASE is INTEGER range 2 .. 16; type TYPE_SET is (LOWER CASE, UPPER CASE); pragma PAGE; -- File Management procedure CREATE (FILE : in out FILE TYPE; MODE : in FILE MODE :=OUT FILE; NAME : in STRING :=""; : = " " FORM : in STRING); procedure OPEN (FILE : in out FILE TYPE; MODE : in FILE MODE: NAME : in STRING; FORM : in STRING :="");

```
procedure CLOSE (FILE : in out FILE TYPE;)
    procedure DELETE (FILE : in out FILE_TYPE);
    procedure RESET (FILE : in out FILE TYPE;
                     MODE : in FILE MODE);
    procedure RESET (FILE : in out FILE TYPE); . .
    function MODE (FILE : in FILE_TYPE) return FILE_MODE;
function NAME (FILE : in FILE_TYPE) return STRING;
    function FORM (FILE : in FILE TYPE) return STRING;
    function IS_OPEN(FILE : in FILE TYPE return BOOLEAN;
pragma PAGE;
    -- control of default input and output files
    procedure SET INPUT (FILE : in FILE TYPE);
    procedure SET OUTPUT (FILE : in FILE TYPE);
    function STANDARD INPUT return FILE TYPE;
    function STANDARD OUTPUT return FILE TYPE;
    function CURRENT INPUT return FILE TYPE;
    function CURRENT OUTPUT return FILE TYPE;
pragma PAGE;
   -- specification of line and page lengths
   procedure SET LINE LENGTH (FILE : in FILE_TYPE;
                                  TO : in COUNT);
   procedure SET_LINE_LENGTH (TO : in COUNT);
   procedure SET PAGE LENGTH (FILE : in FILE TYPE;
                                  TO : in COUNT);
   procedure SET PAGE LENGTH (TO : in COUNT);
   function LINE_LENGTH (FILE : in FILE_TYPE)
                           return COUNT;
   function LINE LENGTH return COUNT;
   function PAGE LENGTH (FILE: in FILE TYPE)
                          return COUNT;
   function PAGE LENGTH return COUNT;
pragma PAGE;
   -- Column, Line, and Page Control
  procedure NEW LINE (FILE : in FILE TYPE;
                       SPACING : in POSITIVE COUNT := 1);
  procedure NEW LINE (SPACING : in POSITIVE COUNT := 1);
  procedure SKIP LINE (FILE : in FILE TYPE;
                        SPACING : in POSITIVE COUNT := 1);
```

```
procedure SKIP LINE (SPACING : in POSITIVE COUNT := 1);
   function END OF LINE (FILE : in FILE_TYPE) return BOOLEAN;
   function END_OF_LINE
                                             return BOOLEAN;
                      (FILE : in FILE_TYPE);
   procedure NEW PAGE
   procedure NEW PAGE
   procedure SKIP PAGE
                        (FILE : in FILE TYPE);
   procedure SKIP PAGE
   function END OF PAGE (FILE : in FILE TYPE) return BOOLEAN;
                                              return BOOLEAN;
   function END OF PAGE
   function END OF FILE (FILE : in FILE TYPE) return BOOLEAN;
   function END OF FILE
                                              return BOOLEAN;
   procedure SET COL
                        (FILE : in FILE TYPE;
                         TO : in POSITIVE COUNT);
   procedure SET COL
                        (TO: in POSITIVE COUNT);
   procedure SET LINE
                       (FILE : in FILE TYPE;
                         TO : in POSITIVE COUNT);
   procedure SET_LINE (TO : in POSITIVE_COUNT);
   function COL
                      (FILE : in FILE TYPE)
                        return POSITIVE COUNT;
   function COL
                       return POSITIVE COUNT;
   function LINE
                        (FILE : in FILE TYPE)
                        return POSITIVE_COUNT;
   function LINE
                       return POSITIVE COUNT;
   function PAGE
                        (FILE : in FILE TYPE)
                        return POSITIVE COUNT;
   function PAGE
                       return POSITIVE COUNT;
pragma PAGE;
   -- Character Input-Output
  procedure GET (FILE: in FILE TYPE; ITEM: out CHARACTER);
  procedure GET
                                       ITEM : out CHARACTER);
  procedure PUT (FILE: in FILE TYPE; ITEM: in CHARACTER);
  procedure PUT
                                       ITEM : in CHARACTER);
  -- String Input-Output
                (FILE : in FILE_TYPE; ITEM : out CHARACTER);
  procedure GET
  procedure GET
                                       ITEM : out CHARACTER);
                 (FILE : in FILE TYPE; ITEM : in CHARACTER);
  procedure PUT
                                       ITEM : in CHARACTER);
  procedure PUT (
  procedure GET LINE (FILE : in FILE TYPE;
```

```
Appendix F
                        ITEM : out STRING;
                        LAST : OUT NATURAL);
                       (ITEM : out STRING;
  procedure GET LINE
                        LAST : out NATURAL);
                       (FILE : in FILE_TYPE;
  procedure PUT_LINE
                        ITEM : in STRING);
                       (ITEM : in STRING);
  procedure PUT_LINE
pragma PAGE;
  -- Generic Package for Input-Output of Integer Types
  generic
      type NUM is range <>;
  package INTEGER IO is
                                 := NUM'WIDTH;
     DEFAULT WIDTH : FIELD
     DEFAULT BASE : NUMBER BASE :=
                                           10;
                   (FILE : in FILE TYPE;
     procedure GET
                     ITEM : out NUM;
                     WIDTH : in FIELD := 0);
                    (ITEM : out NUM;
     procedure GET
                     WIDTH : in FIELD := 0);
                    (FILE : in FILE_TYPE;
     procedure PUT
                     ITEM : in NUM;
                     WIDTH : in FIELD := DEFAULT WIDTH;
                     BASE : in NUMBER_BASE := DEFAULT_BASE);
     procedure PUT (ITEM : in NUM;
                     WIDTH : in FIELD := DEFAULT_WIDTH;
                     BASE : in NUMBER_BASE := DEFAULT_BASE);
                    (FROM : in STRING;
     procedure GET
                     ITEM : out NUM;
                     LAST : out POSITIVE);
                          : out STRING;
     procedure PUT
                    (TO
                     ITEM : in NUM;
                     BASE : in NUMBER_BASE := DEFAULT_BASE);
  end INTEGER_IO;
```

User's Guide

pragma PAGE;

```
-- Generic Packages for Input-Output of Real Types
generic
   type NUM is digits <>;
package FLOAT IO is
  DEFAULT FORE : FIELD :=
  DEFAULT_AFT : FIELD := NUM'DIGITS - 1;
  DEFAULT_EXP : FIELD :=
                  (FILE : in FILE_TYPE;
  procedure GET
                   ITEM : out NUM;
                   WIDTH : in FIELD := 0);
                  (ITEM : out NUM;
   procedure GET
                   WIDTH : in FIELD := 0);
                  (FILE : in FILE_TYPE;
   procedure PUT
                   ITEM : in NUM;
                   FORE : in FIELD := DEFAULT_FORE;
                       : in FIELD := DEFAULT_AFT;
                   AFT
                   EXP : in FIELD := DEFAULT_EXP);
                  (ITEM : in NUM;
   procedure PUT
                   FORE : in FIELD := DEFAULT_FORE;
                   AFT : in FIELD := DEFAULT AFT;
                   EXP : in FIELD := DEFAULT_EXP);
                  (FROM : in STRING;
   procedure GET
                   ITEM : out NUM;
                   LAST : out POSITIVE);
                  (TO : out STRING;
   procedure PUT
                   ITEM : in NUM;
                   AFT : in FIELD := DEFAULT AFT;
                   EXP : in FIELD := DEFAULT EXP);
end FLOAT IO;
pragma PAGE;
```

```
generic
   type NUM is delta <>;
package FIXED IO is
   DEFAULT FORE : FIELD := NUM'FORE;
   DEFAULT AFT : FIELD := NUM'AFT;
  DEFAULT EXP : FIELD := 0;
  procedure GET (FILE : in FILE_TYPE;
                  ITEM : out NUM;
                  WIDTH : in FIELD := 0);
                (ITEM : out NUM;
  procedure GET
                  WIDTH : in FIELD := 0);
                 (FILE : in FILE_TYPE;
  procedure PUT
                  ITEM : in NUM;
                  FORE : in FIELD := DEFAULT_FORE;
                  AFT : in FIELD := DEFAULT AFT;
                  EXP : in FIELD := DEFAULT EXP);
  procedure PUT (ITEM : in NUM;
                  FORE : in FIELD := DEFAULT FORE;
                  AFT : in FIELD := DEFAULT AFT;
                  EXP : in FIELD := DEFAULT_EXP);
  procedure GET (FROM : in STRING;
                  ITEM : out NUM;
                  LAST : out POSITIVE);
  procedure PUT
                (TO : out STRING;
                  ITEM : in NUM;
                  AFT : in FIELD := DEFAULT AFT;
                  EXP : in FIELD := DEFAULT EXP);
end FIXED 10;
pragma PAGE;
```

```
-- Generic Package for Input-Output of Enumeration Types
generic
   type ENUM is (<>);
package ENUMERATION IO is
                  : FIELD
   DEFAULT WIDTH
                              := 0;
   DEFAULT SETTING : TYPE SET := UPPER CASE;
   procedure GET
                   (FILE : in FILE TYPE; ITEM : out ENUM);
   procedure GET
                                          ITEM : out ENUM);
   procedure PUT
                   (FILE : FILE TYPE;
                    ITEM : in ENUM;
                    WIDTH : in FIELD
                                          := DEFAULT WIDTH;
                    SET
                          : in TYPE SET
                                          := DEFAULT SETTING);
   procedure PUT
                   (ITEM : in ENUM;
                    WIDTH : in FIELD
                                          := DEFAULT WIDTH;
                    SET : in TYPE SET := DEFAULT SETTING);
   procedure GET
                   (FROM : in STRING;
                    ITEM : out ENUM;
                    LAST : out POSITIVE);
   procedure PUT
                   (TO : out STRING;
                    ITEM : in ENUM;
                    SET : in TYPE_SET := DEFAULT_SETTING);
end ENUMERATION 10;
pragma PAGE;
   -- Exceptions
   STATUS ERROR: exception renames IO EXCEPTIONS.STATUS ERROR;
   MODE_ERROR : exception renames IO_EXCEPTIONS.MODE ERROR;
   NAME_ERROR : exception renames IO_EXCEPTIONS.NAME_ERROR; USE_ERROR : exception renames IO_EXCEPTIONS.USE_ERROR;
   DEVICE ERROR: exception renames IO EXCEPTIONS.DEVICE ERROR;
   END_ERROR : exception renames IO_EXCEPTIONS.END ERROR;
   DATA ERROR : exception renames IO_EXCEPTIONS.DATA_ERROR;
   LAYOUT ERROR: exception renames IO EXCEPTIONS.LAYOUT ERROR;
pragma page;
private
   type FILE TYPE is
       record
          FT : INTEGER := -1;
       end record;
end TEXT IO;
```

F.8.2 Package IO EXCEPTIONS

The specification of the package IO_EXCEPTIONS:

package IO_EXCEPTIONS is

STATUS_ERROR : exception;
MODE_ERROR : exception;
NAME_ERROR : exception;
USE_ERROR : exception;
DEVICE_ERROR : exception;
END_ERROR : exception;
DATA_ERROR : exception;
LAYOUT_ERROR : exception;

end IO_EXCEPTIONS;

F.8.3 Package BASIC IO The specification of package BASIC IO: with IO EXCEPTIONS; package BASIC IO is type count is range 0 .. integer'last; subtype positive count is count range 1 .. count'last; function get integer return string; -- Skips any leading blanks, line terminators or page -- terminators. Then reads a plus or a minus sign if -- present, then reads according to the syntax of an -- integer literal, which may be based. Stores in item -- a string containing an optional sign and an integer -- literal. -- The exception DATA_ERROR is raised if the sequence -- of characters does not correspond to the syntax -- described above. -- The exception END ERROR is raised if the file terminator -- is read. This means that the starting sequence of an -- integer has not been met. -- Note that the character terminating the operation must -- be available for the next get operation. function get real return string; -- Corresponds to get_integer except that it reads according -- to the syntax of a real literal, which may be based. function get enumeration return string; -- Corresponds to get_integer except that it reads according -- to the syntax of an identifier, where upper and lower

-- case letters are equivalent to a character literal

-- including the apostrophes.

```
function get_item (length : in integer) return string;
-- Reads a string from the current line and stores it in
-- item. If the remaining number of characters on the
-- current line is less than length then only these
-- characters are returned. The line terminator is not
-- skipped.
procedure put item (item : in string);
-- If the length of the string is greater than the current
-- maximum line (linelength), the exception LAYOUT_ERROR
-- is raised.
-- If the string does not fit on the current line a line
-- terminator is output, then the item is output.
-- Line and page lengths - ARM 14.3.3.
procedure set line length (to : in count);
procedure set_page_length (to : in count);
function line length return count;
function page_length return count;
-- Operations on columns, lines and pages - ARM 14.3.4.
procedure new line;
procedure skip_line;
function end_of_line return boolean;
procedure new page;
procedure skip page;
function end of page return boolean;
```

```
function end_of_file return boolean;
   procedure set col (to : in positive count); .
   procedure set_line (to : in positive_count);
   function col return positive count;
   function line return positive count;
   function page return positive count;
   -- Character and string procedures.
   -- Corresponds to the procedures defined in ARM 14.3.6.
   procedure get_character (item : out character);
   procedure get string (item : out string);
   procedure get line (item : out string;
                        last : out natural);
   procedure put character (item : in character);
   procedure put_string (item : in string);
   procedure put_line (item : in string);
  -- exceptions:
  USE_ERROR : exception renames IO_EXCEPTIONS.USE_ERROR;
  DEVICE_ERROR : exception renames IO EXCEPTIONS.DEVICE ERROR;
 END_ERROR : exception renames IO_EXCEPTIONS.END_ERROR; DATA_ERROR : exception renames IO_EXCEPTIONS.DATA_ERROR;
  LAYOUT ERROR: exception renames IO_EXCEPTIONS.LAYOUT_ERROR;
end BASIC IO;
```

F.8.4 Package LOW LEVEL IO

```
The specification or LOW LEVEL_IO is:
with SYSTEM;
package LOW LEVEL IO is
       subtype port_address is System.Word;
       type byte is new integer;
       procedure send_control(device : in port_address;
                                   : in System.Word);
                             data
      procedure send_control(device : in port_address;
                             data : in byte);
       procedure receive_control(device : in
                                             port_address;
                                data : out byte);
      procedure receive_control(device : in
                                              port address;
                                data : out System.Word);
      private
              pragma(inline(send control, receive control);
end LOW LEVEL IO;
```

F.8.5 Package TERMINAL DRIVER

```
The specification of package TERMINAL_DRIVER:

package TERMINAL_DRIVER is

procedure put_character (ch : in character);

procedure get_character (ch : out character);

private

pragma interface (ASM86, put_character);

pragma interface (ASM86, get_character);

end TERMINAL_DRIVER;
```

F.8.6 Package SEQUENTIAL_IO

```
-- Source code for SEQUENTIAL IO
pragma PAGE;
with IO EXCEPTIONS;
generic
   type ELEMENT TYPE is private;
package SEQUENTIAL IO is
  type FILE TYPE is limited private;
  type FILE_MODE is (IN_FILE, OUT FILE);
pragma PAGE;
-- File management
   procedure CREATE(FILE : in out FILE_TYPE;
                   MODE : in
                                 FILE MODE := OUT FILE;
                                 STRING := "";
                   NAME : in
                                          ;= "");
                   FORM : in
                                 STRING
   procedure OPEN (FILE : in out FILE_TYPE;
                   MODE : in
                                FILE MODE;
                   NAME : in
                                  STRING;
                    FORM : in
                                 STRING := "");
   procedure CLOSE (FILE : in cut FILE TYPE);
   procedure DELETE(FILE : in out FILE TYPE);
   procedure RESET (FILE : in out FILE TYPE;
                   MODE : in
                                 FILE MODE);
   procedure RESET (FILE : in out FILE_TYPE);
   function MODE (FILE: in FILE TYPE) return FILE MODE;
   function NAME (FILE: in FILE TYPE) return STRING;
   function FORM (FILE: in FILE TYPE) return STRING;
   function IS_OPEN(FILE : in FILE TYPE) return BOOLEAN;
pragma PAGE;
-- input and output operations
```

```
procedure READ (FILE : in FILE TYPE;
                        ITEM :
                                   out ELEMENT TYPE);
    procedure WRITE (FILE : in FILE TYPE;
                        ITEM : in ELEMENT TYPE);
    function END OF FILE(FILE : in FILE TYPE) return BOOLEAN;
pragma PAGE;
-- exceptions
    STATUS_ERROR : exception renames IO_EXCEPTIONS.STATUS_ERROR;
   MODE_ERROR : exception renames IO_EXCEPTIONS.MODE ERROR;
   NAME_ERROR : exception renames IO_EXCEPTIONS.NAME_ERROR; USE_ERROR : exception renames IO_EXCEPTIONS.USE_ERROR;
   DEVICE_ERROR : exception renames IO_EXCEPTIONS.DEVICE_ERROR;
   END_ERROR : exception renames IO_EXCEPTIONS.END_ERROR;
DATA_ERROR : exception renames IO_EXCEPTIONS.DATA_ERROR;
pragma PAGE;
private
   type FILE_TYPE is new INTEGER;
end SEQUENTIAL 10;
```

F.9 Machine Code Insertions

The reader should be familiar with the code generation strategy and the 80×86 instruction set to fully benefit from this section.

As described in chapter 13.8 of the ARM [DoD 83] it is possible to write procedures containing only code statements using the predefined package MACHINE_CODE. The package MACHINE_CODE defines the type MACHINE_INSTRUCTION which, used as a record aggregate, defines a machine code insertion. The following sections list the type MACHINE_INSTRUCTION and types on which it depends, give the restrictions, and show an example of how to use the package MACHINE CODE.

F.9.1 Predefined Types for Machine Code Insertions

The following types are defined for use when making machine code insertions (their type declarations are given in the following pages):

type opcode_type
type operand_type
type register_type
type segment_register
type machine instruction

The type REGISTER TYPE defines registers and register combinations. The double register combinations (e.g. BX SI) can be used only as address operands (BX SI describing [BX+SI]). The registers STi describe registers on the floating stack. (ST is the top of the floating stack).

The type SEGMENT_REGISTER defines the four segment registers that can be used to overwrite default segments in an address operand.

The type MACHINE_INSTRUCTION is a discriminant record type with which every kind of instruction can be described. Symbolic names may be used in the form

name 'ADDRESS

Restrictions as to symbolic names can be found in section F.9.2.

```
type opcode_type is (
                  -- 8086 instructions:
                                                          · m AAS,
                                                m AAM,
                                    m AAD,
                       m AAA,
                                                m AND,
                                    m_ADD,
                       m ADC,
                                    m CALLn,
                       m CALL,
                                                            m_CLI,
                                                m CLD
                       m CBW,
                                    m CLC,
                                                            m CWD,
                                                m CMPS,
                                    m CMP,
                       m CMC,
                                    m DAS,
                       m DAA,
                                                m HLT,
                                    m_DIV,
                        m DEC,
                                                             m INC,
                                                m IN,
                                    m_IMUL,
                        m IDIV,
                                                m IRET,
                                    m INTO,
                        m_INT,
                                                             m_JBE,
                                                m JB,
                       m_JA,
                                    m JAE,
                                                             m_JG,
                                                m JE,
                                    m JCXZ,
                        m_JC,
                                                 m JLE,
                                                             m JNA,
                                    m_JL,
                        m JGE,
                                                             mJNC
                                                 m JNBE,
                                    m JNB,
                        m JNAE,
                                                             m_JNL,
                                                 m JNGE,
                                    m JNG,
                        m JNE,
                                                             m_JNS,
                                                 m JNP,
                                    m JNO,
                        m JNLE,
                                                             m JPE,
                                                 m JP,
                                    m_JO,
                        m JNZ,
                                                             m JMP,
                                                 m^{-}JZ
                                    m_JS,
                        m JPO,
                                                             m_LEA,
                                                 m_LES,
                        m_LAHF,
                                    m LDS,
                                    m_LODS,
                        m_LOCK,
                                                             m_LOOPNZ,
                                                 m LOOPNE,
                                    m LOOPE,
                        m_LOOP,
                                                             m MUL,
                                                 m MOVS,
                                    m_MOV,
                        m LOOPZ,
                                                             m OR,
                                    m_NOP,
                                                 m NOT,
                        m NEG,
                                                             m PUSH,
                                                 m POPF,
                                    m_POP,
                        m OUT,
                        m PUSHF,
                                                             m ROR,
                                                 m ROL,
                                    m RCR,
                        m RCL,
                                                 m REPNE,
                                    m REPE,
                        m REP,
                                                             m_RETNP,
                                                 m_RETN,
                                    m RETP,
                        m RET,
                        m SAHF,
                                                 m_SHL,
                                                             m SHR,
                                    m_SAR,
                        m SAL,
                                    m_SCAS,
                        m SBB,
                                                             m STOS,
                                    m STD,
                                                 m STI,
                        m STC,
                                                             m XCHG,
                                                 m WAIT,
                                    m TEST,
                        m SUB,
```

m = XOR,

m XLAT,

```
-- 8087/80187/80287 Floating Point Processor instructions
                                             m FADDD,
                                                         m FADDP,
                      m FABS,
                                  m FADD,
                                             m FCHS,
                                                         m FNCLEX,
                      m FBLD,
                                  m FBSTP,
                                                         m FCOMPD,
                                             m FCOMP,
                                  m FCOMD,
                      m FCOM,
                                                         m FDIVD,
                                  m FDECSTP, m FDIV,
                      m FCOMPP,
                                             m FDIVRD,
                                                         m FDIVRP,
                                  m FDIVR,
                      m FDIVP,
                                                         m FICOM,
                                              m FIADDD,
                                  m FIADD,
                      m FFREE,
                                             m FICOMPD, m FIDIV,
                                  m FICOMP,
                      m FICOMD,
                                              m FIDIVRD,
                      m FIDIVD,
                                  m FIDIVR,
                                  m FILDD,
                                                         m FIMUL,
                      m FILD,
                                              m FILDL,
                                                         m FIST,
                      m FIMULD,
                                  m FINCSTP, m FNINIT,
                                                         m_FISTPL,
                      m FISTD,
                                              m FISTPD,
                                  m FISTP,
                      m FISUB,
                                              m FISUBRD, m_FLD,
                                  m FISUBR,
                      m FISUBD,
                                                         m FLDLG2,
                                              m FLDENV,
                      m FLDD,
                                  m FLDCW,
                                                         m FLDPI,
                                              m FLDL2T,
                      m FLDLN2,
                                  m FLDL2E,
                                                         m FMULD,
                                              m FMUL,
                      m FLDZ,
                                  m FLD1,
                                              m FPATAN,
                                                         m FPREM,
                                  m FNOP,
                      m FMULP,
                                                         m FSAVE,
                      m FPTAN,
                                  m FRNDINT, m FRSTOR,
                                              m FSQRT,
                      m FSCALE,
                                  m FSETPM.
                                              m FSTCW,
                      m FST,
                                  m FSTD,
                                                          m FSTSW,
                      m FSTENV,
                                              m FSTPD,
                                  m FSTP,
                                                          m FSUBP,
                      m FSTSWAX,
                                  m FSUB,
                                              m FSUBD,
                                                          m_FTST,
                                              m FSUBRP,
                                  m FSUBRD,
                      m FSUBR,
                                                          m FXTRACT,
                                              m FXCH,
                      m FWAIT,
                                  m FXAM,
                                  m FYL2XP1, m F2XM1,
                      m FYL2X,
-- 80186/80286/80386 instructions:
    Notice that some immediate versions of the 8086 instructions
    only exist on these targets (shifts, rotates, push, imul, ...)
                                              m ENTER,
                                                          m INS,
                      m BOUND,
                                  m CLTS,
                                                          m_LIDT
                                              m LGDT,
                      m LAR,
                                  m LEAVE,
                      m_LSL
                                  m OUTS
                                              m POPA,
                                                          m PUSHA
                      m SGDT,
                                  m SIDT,
                                  m LLDT,
                                              m LMSW,
                                                          m LTR,
                      m ARPL,
                      m SLDT,
                                  m SMSW,
                                              m STR,
                                                          m VERR,
                      m VERW,
```

-- the 80386 specific instructions:

```
m SETA,
           m SETAE,
                       m SETB,
                                   m SETBE,
           m SETE,
                                   m_SETGE,
                       m SETG,
m SETC,
           m SETLE,
                       m SETNA,
                                   m SETNAE,
m SETL,
m SETNB,
                       m SETNC,
           m SETNBE,
                                   m SETNE,
m SETNG,
           m SETNGE,
                       m_SETNL,
                                   m SETNLE
                                   m_SETNZ,
           m SETNP,
                       m SETNS,
m SETNO,
m SETO,
           m SETP,
                       m SETPE,
                                   m SETPO,
m SETS,
           m SETZ,
m BSF,
           m BSR,
                                   m BTS,
           m BTC,
                       m BTR,
m BT,
m LFS,
           m LGS,
                       m LSS,
m_MOVZX
           m MOVSX,
m MOVCR,
           m MOVDB,
                       m MOVTR,
m_SHLD,
           M SHRD,
```

-- the 80387 specific instructions

```
m_FUCOM, m_FUCOMP, m_FUCOMPP
m_FPREM1, m_FSIN, m_FCOS, m_FSINCOS
```

-- byte/word/dword variants (to be used, when not deductible from
-- context

```
m ADDCB.
            m ADCW,
                        m ADCD,
                        m_ADDD,
m ADDB,
            m ADDW,
m ANDB,
            m ANDW,
                        m ANDD,
            m BTW,
                        m BTD,
                        m BTCD,
            m BTCW,
                        m BTRD,
            m BTRW,
            m BTSW,
                        m BTSD,
            m CBWW,
                        m CWDE,
            m CWDW
                        m CDQ,
m CMPB,
            m CMPW,
                        m CMPD,
m CMPSB,
            m CMPSW,
                        m CMPSD.
m DECB,
            m DECW,
                        m DECD,
                        m_DIVD,
m DIVB,
            m DIVW,
m IDIVB,
            m IDIVW,
                        m IDIVD,
m IMULB,
            m IMULW,
                        m IMULD,
m INCB,
            m INCW,
                        m INCD,
                        m INSD,
m INSB,
            m INSW,
m LODSB,
                        m LODSD,
            m LODSW,
m MOVB,
            m MOVW,
                        m MOVD,
m MOVSB,
            m MOVSW,
                        m MOVSD,
m MOVSXB,
            m MOVSXW,
m MOVZXB,
           m MOVZXW,
m MULB,
           m MULW,
                        m MULD,
m NEGB,
           m NEGW,
                        m NEGD,
m NOTB,
           m NOTW,
                       m NOTD,
m ORB,
           m ORW,
                       m ORD,
m OUTSB,
           m OUTSW.
                       m CUTSD,
           m POPW,
                       m POPD,
           m PUSHW,
                       m PUSHD,
```

```
m RCLD,
m RCLB,
           m RCLW,
                     m RCRD,
           m RCRW,
m RCRB,
                    m_ROLD,
           m ROLW,
m ROLB,
                     m RORD,
m_RORB,
          m RORW,
           m SALW,
                     m SALD,
m SALB,
                     m SARD,
           m_SARW,
m_SARB,
           m_SHLW,
                     m_SHLDW,
m SHLB,
                    m SHRDW,
m SHRB,
           m SHRW,
m SBBB,
           m SBBW,
                      m SBBD,
m SCASB,
           m SCASW,
                      m SCASD,
                      m_STOSD,
           m_STOSW,
m_STOSB,
                      m_SUBD,
           m SUBW,
m SUBB,
                      m TESTD,
m TESTB,
           m TESTW,
m XORB,
           m XORW,
                      m_XORD,
                      m_DATAD
m DATAB,
           m_DATAW,
```

-- Special 'instructions'

m_label, m_reset);

pragma page;

```
type operand_type is (none,
                                             -- no operands
                 immediate,
                                        -- 1 immediate operand
                 register,
                                        -- 1 register operand
                                        -- 1 address operand
                 address,
                 system_address,
                                        -- 1 'address operand
                                         -- CALL name
                 name,
                                        -- 2 operands: dest is
                 register_immediate,
                                        -- register, source is
                                        -- immediate
                 register_register,
                                        -- 2 register operands
                 register address,
                                        -- 2 operands: dest is
                                        -- register, source is
                                        -- address
                                        -- 2 operands: dest is
                 address register,
                                        -- address, source is
                                        -- register
                 register_system_address,-- 2 operands: dest is
                                         -- register, source is
                                         -- 'address
                 system_address_register,-- 2 operands: dest is
                                         -- 'address, source is
                                         -- register
                 address immediate,
                                         -- 2 operands: dest is
                                         -- 'address, source is
                                         -- immediate
                 system_address_immediate, -- 2 operands: dest is
                                          -- 'address, source is
                                          -- immediate
                 immediate_register,
                                          -- only allowed for
                                          -- OUT
                                          -- port is immediate
                                          -- source is register
                 immediate immediate,
                                          -- only allowed for
                                          -- ENTER
       register_register_immediate,
                                          -- allowed for IMULimm,
                                          -- SHRDimm, and SHLDimm
       register_address_immediate
                                          -- allowed for IMULimm
       register system address immediate -- allowed for IMULimm
       address register immediate
                                          -- allowed for SHRDimm,
                                          -- SHLDimm
       system address register immediate -- allowed for SHRDimm,
                                          -- SHLDimm
                                         );
type register type is (AX, CX, DX, BX,
                                        -- word registers
                       SP, BP, SI, DI,
                       AL, CL, DL, BL,
                                          -- byte registers
                       AH, CH, DH, BH,
                       EAX, ECX, EDX, EBX -- dword registers
```

```
Appendix F

ESP, EBP, ESI, EDI

ES, CS, SS, DS, -- selector registers FS, GS

BX_SI, BX_DI, -- 8086/80186/80286 BP_SI, BP_DI, -- combinations

ST, ST1, ST2, ST3, -- floating -- stack -- registers

ST4, ST5, ST6, ST7,
```

type segment_register is (ES, CS, SS, DS, FS, GS, nil);
-- segment registers
-- FS and GS are only allowed in 80386 targets
subtype machine_string is string (1..100);
pragma page;

nil);

User's Guide

```
type machine_instruction (operand_kind : operand type is
   record
      opcode : opcode type;
      case operand kind is
          when immediate =>
             immediate
                                : integer;
          when register =>
             r register
                                : register_type;
          when address =>
             a_segment : register_type;
a_address_reg : register_type;
a_offset : integer;
             a segment
         when system address =>
             sa address
                                : system.address;
         when name =>
             n_string
                                 : machine string;
         when register immediate =>
             r i register
                              : register_type;
             r i immediate
                                : integer;
         when register register =>
             r r register to : register type;
             r_r_register_from : register_type;
         when register address =>
            r_a_register_to : register_type;
r_a_segment : segment_register;
r_a_address_reg : register_type;
             r_a_offset _
                                : integer;
         when address register =>
            a_r_segment : segment register;
            a_r_address_reg : register_type;
            a r offset : integer;
            a_r_register_from : register_type;
         when register_system address =>
            r_sa_register_to : register_type;
            r sa address
                               : system.address
         when system_address_register =>
            sa_r_address : system.address;
sa_r_reg_from : register_type;
```

```
when address immediate =>
           a_i_segment : segment_register;
a_i_address_reg : register_type;
           a_i_offset : integer;
a_i_immediate : integer;
       when system_address_immediate =>
           sa_i_address : system.address;
sa_i_immediate : integer;
       when immediate register =>
           i_r_register : integer;
i_r_register : register
                                : register type;
       when immediate immediate =>
           i_i_immediatel : integer;
           i i immediate2 : integer;
       when register register immediate =>
           r_r_i_register1 : register_type;
r_r_i_register2 : register_type;
           r_r_i_immediate2 : integer;
       when register_address_immediate =>
           r_a_i_register : register_type;
r_a_i_segment : register_type;
           r_a_i_address_reg : register_type;
           raiioffset : integer;
raiimmediate : integer;
       when register_system_address immediate =>
           r_sa_i_register : register_type;
addr10 : system.address;
           r sa i immediate : integer;
       when address_register immediate =>
           a_r_i_register : register_type;
a_r_i_segment : register_type;
           a_r_i_address_reg : register_type;
           a r i offset : integer;
           a_r_i_immediate : integer;
       when system_address_register immediate =>
           sa_r_i_address : system.address;
sa_r_i_register : register_type;
           sa r i immediate : integer;
       when others =>
           null:
   end case;
end record;
```

F.9.2 Restrictions

Only procedures, and not functions, may contain machine code insertions. Also procedures that use machine code insertions must be inline.

Symbolic names in the form x'ADDRESS can only be used in the following cases:

- x is an object of scalar type or access type declared as an object, a formal parameter, or by static renaming.
- 2) x is an array with static constraints declared as an object (not as a formal parameter or by renaming).
- 3) x is a record declared as an object (not a formal parameter or by renaming).

All opcodes defined by the type OPCODE_type except the m_CALL can be used.

Two opcodes to handle labels have been defined:

m_label: defines a label. The label number must be in the range 1 <= x <= 25 and is put in the offset field in the first operand of the MACHINE_INSTRUCTION.

m_reset: used to enable use of more than 25 labels. The label number after a m_RESET must be in the range 1 <= x <=25. To avoid errors you must make sure that all used labels have been defined before a reset, since the reset operation clears all used labels.

All floating instructions have at most one operand which can be any of the following:

- a memory address
- a register or an immediate value
- an entry in the floating stack

F.9.3 Examples

The following section contains examples of how to use the machine code insertions and lists the generated code.

F.9.3.1 Example Using Labels

The following assembler code can be described by machine code insertions as shown:

```
MOV AX, 7
     MOV CX, 4
     CMP AX, CX
      JG 1
      JΕ
         2
     MOV CX, AX
  1: ADD AX,CX
  2: MOV SS: [BP+DI], AX
with MACHINE CODE; use MACHINE CODE;
package example MC is
    procedure test labels;
    pragma inline (test labels);
end example MC;
package body example MC is
procedure test labels is
begin
  MACHINE_INSTRUCTION'(register immediate, m MOV, AX, 7);
  MACHINE_INSTRUCTION'(register_immediate, m_MOV, CX, 4);
  MACHINE_INSTRUCTION'(register_register, m CMP, AX, CX);
  MACHINE_INSTRUCTION'(immediate, m_JG, 1);
MACHINE_INSTRUCTION'(immediate, m_JE, 2);
  MACHINE INSTRUCTION'(register register, m MOV, CX, AX);
  MACHINE INSTRUCTION'(immediate, m label, 1);
  MACHINE_INSTRUCTION'(register register, m ADD, AX, CX);
  MACHINE_INSTRUCTION'(immediate, m label, 2);
  MACHINE INSTRUCTION' (address register, m MOV, SS, BP DI, O, AX);
end test labels;
end example MC;
```

F.10 Package Tasktypes

The TaskTypes packages defines the TaskControlBlock type. This data structure could be useful in debegging a tasking program. The following package Tasktypes is for the 80x86 Real Address Mode and 80286 Protected Mode systems:

```
with System;
package TaskTypes is
                      is System.Word;
   subtype Offset
                     is System.Word;
   subtype BlockId
                          is new System.Word;
   type
           TaskEntry
           EntryIndex
                          is new System.Word;
   type
           AlternativeId is new System.Word;
   type
                          is new System.LongWord;
   type
           Ticks
           TaskState
                          is (Initial,
   type
                              Engaged,
                              Running,
                              Delayed,
                              EntryCallingTimed,
                              EntryCallingUnconditional,
                             SelectingTimed,
                              SelectingTerminable,
                              Accepting,
                              Synchronizing,
                              Completed,
                              Terminated);
   type TaskTypeDescriptor is
      record
         priority
                            : System.Priority;
         entry_count
                            : System.Word;
         block id
                            : BlockId;
         first own address: System.Address;
         module number
                           : System.Word;
         entry number
                            : System.Word;
                            : System.Address;
         code address
         stack size
                           : System.LongWord;
         stack segment size: System.Word;
      end record;
   type NPXSaveArea is array(1..48) of System.Word;
pragma page;
   type TaskControlBlock is
      record
         sem
                       : System.Semaphore;
```

-- Delay queue handling

: System.TaskValue; dnext : System.TaskValue ; dprev

: Ticks ; ddelay

-- Saved registers

: System.Word ; SS : System.Word ; SP

-- Ready queue handling

: System.TaskValue ; next

-- Semaphore handling

: System.TaskValue ; semnext

-- Priority fields

: System.Priority; priority saved_priority : System.Priority;

time_slice : Ticks;

stack_start : Offset; : Offset; stack_end

-- State fields

: TaskState; state : TaskState
is_abnormal : Boolean;
is_activated : Boolean; state : Boolean; failure

-- Activation handling fields

activator : System.TaskValue; act_chain : System.TaskValue; next_chain : System.TaskValue; no_not_act : System.Word; act_block : BlockId;

-- Accept queue fields

: System.TaskValue; partner next_partner : System.TaskValue;

-- Entry queue fields

: System. TaskValue; next caller

-- Rendezvous fields

: System.TaskValue; called task

: TaskEntry; task entry entry_index : EntryIndex; entry_assoc : System.Address; call_params : System.Address; call_params : AlternativeId; alt id

: System.ExceptionId; excp_id

-- Dependency fields

: System. TaskValue; parent task

parent block : BlockId;

next_child : System manifer to first_child : System.TaskValue; : System. TaskValue; prev child

child_act : System.Word; block_act : System.Word;

terminated task: System. TaskValue;

-- Abortion handling fields

: System.Word; busy

-- Auxiliary fields

:_TaskTypeDescriptor; ttd

: System.Word; segment size

-- Run-Time System fields

: Offset; ACF

: System.Address; collection

-- NPX save area

: NPXSaveArea; NPXSave

end record;

end TaskTypes;

```
The following package Tasktypes is for the 80386 Protected Mode
system:
with System;
package TaskTypes is
                     is System.UnsignedDWord;
   subtype Offset
                     is System.UnsignedDWord;
   subtype BlockId
                         is new System.UnsignedDWord;
   type
           TaskEntry
                         is new System.UnsignedDWord;
           EntryIndex
   type
           AlternativeId is new System.UnsignedDWord.
   type
                         is new System.UnsignedDWord;
   type
           Ticks
                         is new Boolean:
           Bool
   type
          Bool'size
                        use 8;
   for
                         is new System.UnsignedDWord;
           UIntg
   type
                         is (Initial,
          TaskState
   type
                             Engaged,
                             Running,
                             Delayed,
                              EntryCallingTimed,
                             EntryCallingUnconditional,
                             SelectingTimed,
                             SelectingTerminable,
                             Accepting,
                             Synchronizing,
                             Completed,
                             Terminated);
   type TaskTypeDescriptor is
      record
         priority
                           : System.Priority;
                           : UIntg;
         entry count
         block id
                           : BlockId;
         first own address: System.Address;
                           : UInta;
         module number
         entry_number
                           : UIntg;
         code address
                           : System.Address;
                           : System.QWord;
         stack size
         stack segment size: UIntg;
      end record;
   type NPXSaveArea is array(1..48) of System.Word;
pragma page;
   type TaskControlBlock is
      record
                        : System.Semaphore;
         sem
```

-- Delay queue handling : System.TaskValue ; dnext dprev : System.TaskValue ; : Ticks ; ddelay -- Saved registers SS : System.Word ; : Offset ; SP -- Ready queue handling : System.TaskValue ; next -- Semaphore handling semnext : System.TaskValue ; -- Priority fields : System.Priority; priority saved_priority : System.Priority; time_slice : Ticks; stack_start : Offset;
stack_end : Offset; stack end : Offset; -- State fields is_activated : Bool; : Bool; failure

-- Activation handling fields

activator : System.TaskValue; act_chain : System.TaskValue; next_chain : System.TaskValue; no_not_act : System.Word; act_block : BlockId;

-- Accept queue fields

partner : System.TaskValue;
next_partner : System.TaskValue;

-- Entry queue fields

next caller : System.TaskValue;

-- Rendezvous fields

called_task : System.TaskValue;

task_entry : TaskEntry;
entry_index : EntryIndex;
entry_assoc : System.Address;
call_params : System.Address;
alt_id : AlternativeId;
excp_id : System.ExceptionId;

-- Dependency fields

: System.TaskValue; parent_task

parent_block : BlockId;
child_task : System.TaskValue;
next_child : System.TaskValue;
first_child : System.TaskValue;
prev_child : System.TaskValue;
child_act : System.Word:

child_act : System.Word; block_act : System.Word;

terminated_task: System.TaskValue;

-- Abortion handling fields

busy : System.Word;

-- Auxiliary fields

ttd : TaskTypeDescriptor;

segment stree : System.Word;

-- Run-Time System fields

ACF : Offset;

collection : System.Address;

-- NPX save area

NPXSave : NPXSaveArea;

end record;

end TaskTypes;

APPENDIX C

TEST PARAMETERS

Certain tests in the ACVC make use of implementation-dependent values, such as the maximum length of an input line and invalid file names. A test that makes use of such values is identified by the extension .TST in its file name. Actual values to be substituted are represented by names that begin with a dollar sign. A value must be substituted for each of these names before the test is run. The values used for this validation are given below.

\$ACC SIZE

48

An integer literal whose value is the number of bits sufficient to hold any value of an access type.

\$BIG ID1

Identifier the size of the maximum input line length with varying last character.

SBIG ID2

Identifier the size of the maximum input line length with varying last character.

\$BIG ID3

Identifier the size of the maximum input line length with varying middle character.

\$BIG ID4

Identifier the size of the maximum input line length with varying middle character.

\$BIG INT LIT

An integer literal of value 298 with enough leading zeroes so that it is the size of the maximum line length.

\$BIG REAL LIT

universal real literal of value 690.0 with enough leading zeroes to be the size of the

1..125 -> 'A', 126 -> '1'

1..125 -> 'A', 126 -> '2'

 $1..63 \Rightarrow 'A', 64 \Rightarrow '3',$ 65..126 => 'A'

 $1..63 \Rightarrow 'A', 64 \Rightarrow '4',$ 65..126 => 'A'

 $0..123 \Rightarrow 0.124..126 \Rightarrow 298$

 $0..120 \Rightarrow 0.121..126 \Rightarrow 69.0E1$

maximum line length.

\$BIG STRINC1

C..63 -> 'A'

A string literal which when catenated with BIG_STRING2 yields the image of BIG ID1.

\$BIG STRING2

 $0..62 \Rightarrow 'A', 63 \Rightarrow '1'$

A string literal which when catenated to the end of BIG_STRINGl yields the image of BIG_ID1.

\$BLANKS

0..106 -> ' '

A sequence of blanks twenty characters less than the size of the maximum line length.

\$COUNT LAST

2 147 483 647

A universal integer literal whose value is TEXT IO.COUNT'LAST.

\$DEFAULT MEM_SIZE

16#1 0000 0000#

An integer literal whose value is SYSTEM.MEMORY_SIZE.

\$DEFAULT_STOR_UNIT

16

An integer literal whose value is SYSTEM.STURAGE_UNIT.

\$DEFAULT SYS NAME

IAPX386

The value of the constant SYSTEM.SYSTEM_NAME.

\$DELTA DOC

2=1.0=E-31

A real literal whose value is SYSTEM.FINE DELTA.

\$FIELD LAST

35

A universal integer literal whose value is TEXT_IO.FIELD'LAST.

\$FIXED NAME

N. SUCH TYPE

The name of a predefined fixed-point type other than DURATION.

\$FLOAT NAME

NO_SUCH_TYPE

The name of a predefined floating-point type other than

SHORT FLOAT, FLOAT. LONG_FLOAT. 100000.0 SGREATER THAN DURATION A universal real literal that lies between DURATION'BASE'LAST and DURATION'LAST or any value in the range of DURATION. 200000.0 \$GREATER THAN DURATION_BASE_LAST A universal real literal that is greater than DURATION'BASE'LAST. 31 \$HIGH PRIORITY An integer literal whose value is the upper bound of the range for the subtype SYSTEM.PRIORITY. ILLEGAL!@#\$%^ \$ILLEGAL EXTERNAL FILE_NAME1 An external file name which contains invalid characters. ILLEGAL&() += \$ILLEGAL EXTERNAL FILE_NAME2 An external file name which is too long. -2147483648 SINTEGER FIRST A universal integer literal whose value is INTEGER'FIRST. 2147483647 \$INTEGER LAST A universal integer literal whose value is INTEGER'LAST. 2 147 483 648 \$INTEGER LAST PLUS 1 A universal integer literal whose value is INTEGER'LAST + 1. -100000.0 \$LESS THAN DURATION A universal real literal that lies between DURATION'BASE'FIRST and DURATION'FIRST or any value in the range of DURATION. \$LESS_THAN_DURATION_BASE_FIRST -200000.0 A universal real literal that is less than DURATION'BASE'FIRST. 0 \$LOW PRIORITY

An integer literal whose value is the lower bound of the range for the subtype SYSTEM.PRIORITY.

\$MANTISSA DOC

An integer literal whose value is SYSTEM.MAX_MANTISSA.

31

SMAX DIGITS

Maximum digits supported for floating-point types.

15

\$MAX IN LEN

Maximum input line length permitted by the implementation.

126

SMAX INT

A universal integer literal whose value is SYSTEM.MAX_INT.

9223372036854775807

SMAX INT PLUS 1

A universal integer literal whose value is SYSTEM.MAX_INT+1.

9223372036854775808

\$MAX_LEN_INT_BASED LITERAL

A universal integer based literal whose value is 2#11# with enough leading zeroes in the mantissa to be MAX_IN_LEN long.

1..2 => '2:', 3..123 => '0', 124..126 => '11:'

\$MAX LEN_REAL_BASED_LITERAL

A universal real based literal whose value is 16:F.E: with enough leading zeroes in the mantissa to be MAX_IN_LEN long.

1..3 => '16:', 4..122 => '0', 123..126 => 'F.E:'

\$MAX STRING LITERAL

A string literal of size MAX_IN_LEN, including the quote characters.

1 => '"', 2..125 => 'A', 126 => '"'

\$MIN INT

A universal integer literal whose value is SYSTEM.MIN_INT.

-16#8000_0000_0000_0000#

\$MIN TASK SIZE

An integer literal whose value is the number of bits required to hold a task object which has no entries, no declarations, and "NULL;" as the only statement in its body.

32

\$NAME

NO SUCH TYPE

A name of a predefined numeric type other than FLOAT, INTEGER, SHORT_FLOAT, SHORT_INTEGER, LONG_FLOAT, or LONG_INTEGER.

\$NAME LIST

IAPX386 PM

A list of enumeration literals in the type SYSTEM. NAME, separated by commas.

\$NEG BASED INT

16#FFFF_FFFF_FFFF FFFF#

A based integer literal whose highest order nonzero bit falls in the sign bit position of the representation for SYSTEM.MAX_INT.

\$NEW MEM SIZE

16#1 0000 0000#

An integer literal whose value is a permitted argument for pragma memory_size, other than \$DEFAULT_MEM_SIZE. If there is no other value, then use \$DEFAULT_MEM_SIZE.

\$NEW_STOR_UNIT

16

An integer literal whose value is a permitted argument for pragma storage_unit, other than \$DEFAULT_STOR_UNIT. If there is no other permitted value, then use value of SYSTEM.STORAGE_UNIT.

\$NEW SYS NAME

IAPX386 PM

A value of the type SYSTEM.NAME, other than SDEFAULT_SYS_NAME. If there is only one value of that type, then use that value.

\$TASK_SIZE

32

An integer literal whose value is the number of bits required to hold a task object which has a single entry with one inout parameter.

STICK

0.000 000 062 5

A real literal whose value is SYSTEM.TICK.

APPENDIX D

WITHDRAWN TESTS

Some tests are withdrawn from the ACVC because they do not conform to the Ada Standard. The following 43 tests had been withdrawn at the time of validation testing for the reasons indicated. A reference of the form AI-ddddd is to an Ada Commentary.

A39005G

This test unreasonably expects a component clause to pack an array component into a minimum size (line 30).

B97102E

This test contains an unintended illegality: a select statement contains a null statement at the place of a selective wait alternative (line 31).

BC3009B

This test wrongly expects that circular instantiations will be detected in several compilation units even though none of the units is illegal with respect to the units it depends on; by AI-00256, the illegality need not be detected until execution is attempted (line 95).

CD2A62D

This test wrongly requires that an array object's size be no greater than 10 although its subtype's size was specified to be 40 (line 137).

CD2A63A..D, CD2A66A..D, CD2A73A..D, CD2A76A..D [16 tests]

These tests wrongly attempt to check the size of objects of a derived type (for which a 'SIZE length clause is given) by passing them to a derived subprogram (which implicitly converts them to the parent type (Ada standard 3.4:14)). Additionally, they use the 'SIZE length clause and attribute, whose interpretation is considered problematic by the WG9 ARG.

CD2A81G, CD2A83G, CD2A84M & N, & CD50110

These tests assume that dependent tasks will terminate while the main program executes a loop that simply tests for task termination; this is not the case, and the main program may loop indefinitely (lines 74, 85, 86 & 96, 86 & 96, and 58, resp.).

CD2B15C & CD7205C

These tests expect that a 'STORAGE_SIZE length clause provides precise control over the number of designated objects in a collection; the Ada standard 13.2:15 allows that such control must not be expected.

CD2D11B

This test gives a SMALL representation clause for a derived fixed-point

type (at line 30) that defines a set of model numbers that are not necessarily represented in the parent type; by Commentary AI-00099, all model numbers of a derived fixed-point type must be representable values of the parent type.

CD5007B

This test wrongly expects an implicitly declared subprogram to be at the address that is specified for an unrelated subprogram (line 303).

ED7004B, ED7005C & D, ED7006C & D [5 tests]

These tests check various aspects of the use of the three SYSTEM pragmas; the AVO withdraws these tests as being inappropriate for validation.

CD7105A

This test requires that successive calls to CALENDAR.CLOCK change by at least SYSTEM.TICK; however, by Commentary AI-00201, it is only the expected frequency of change that must be at least SYSTEM.TICK --particular instances of change may be less (line 29).

CD72C3B, & CD72O4B

These tests use the 'SIZE length clause and attribute, whose interpretation is considered problematic by the WG9 ARG.

CD7205D

This test checks an invalid test objective: it treats the specification of storage to be reserved for a task's activation as though it were like the specification of storage for a collection.

CE2107I

This test requires that objects of two similar scalar types be distinguished when read from a file--DATA_ERROR is expected to be raised by an attempt to read one object as of the other type. However, it is not clear exactly how the Ada standard 14.2.4:4 is to be interpreted; thus, this test objective is not considered valid. (line 90)

CE3111C

This test requires certain behavior, when two files are associated with the same external file, that is not required by the Ada standard.

CE3301A

This test contains several calls to END_OF_LINE & END_OF_PAGE that have no parameter: these calls were intended to specify a file, not to refer to STANDARD INPUT (lines 103, 107, 118, 132, & 136).

CE3411B

This test requires that a text file's column number be set to COUNT'LAST in order to check that LAYOUT_ERROR is raised by a subsequent PUT operation. But the former operation will generally raise an exception due to a lack of available disk space, and the test would thus encumber validation testing.

This test expects that the string "-- TOP OF PAGE. --63" of line 204 will appear at the top of the listing page due to a pragma PAGE in line 203; but line 203 contains text that follows the pragma, and it is this that must appear at the top of the page.

APPENDIX E

COMPILER OPTIONS AS SUPPLIED BY

DDC-I, Inc

Compiler:

DACS-80386 Protected Mode Version 4.3

ACVC Version:

1.10

OPTION	EFFECT
/check	Generates run-time constraint checks.
/CONFIGURATION_FILE	Specifies the file used by the compiler.
/DEBUG /NODEBUG	Include the symbolic debugging in the program library.
/EXCEPTION_TABLES /NOEXCEPTION_TABLES	Include/exclude exception handler tables from the generated code.
/LIBRARY	Specify program library used.
/LIST /NOLIST	Write a source listing on the list file.
/OPTIMIZE /NOOPTIMIZE	Specify compiler optimization
/PROGRESS /NOPROGRESS	Display compiler progress
/SAVE_SOURCE /NOSAVE_SOURCE	Copies source to program library
/XREF /NOXREF	Creates a cross reference listing